

CONSTRUCTION ENGINEERING RESEARCH LAB (ARMY) CHAMPAIGN IL F/G 7/3  
IDENTIFICATION AND QUANTIFICATION OF HYDROCARBON PRODUCTS IN EF--ETC(U)  
MAY 80 R S VOGEL; W J MIKUCKI; R J FILECCIA  
CERL-IR-N-91 NL

N1

1 of 1


AD  
AD 0.0.26.9

END

DATE \_\_\_\_\_

FILED

—



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

construction  
engineering  
research  
laboratory




United States Army  
Corps of Engineers

...Serving the Army  
...Serving the Nation

12  
INTERIM REPORT N-91


May 1980

Oil Pollution Control at Military Installations



IDENTIFICATION AND QUANTIFICATION OF  
HYDROCARBON PRODUCTS IN EFFLUENTS

AD A088268

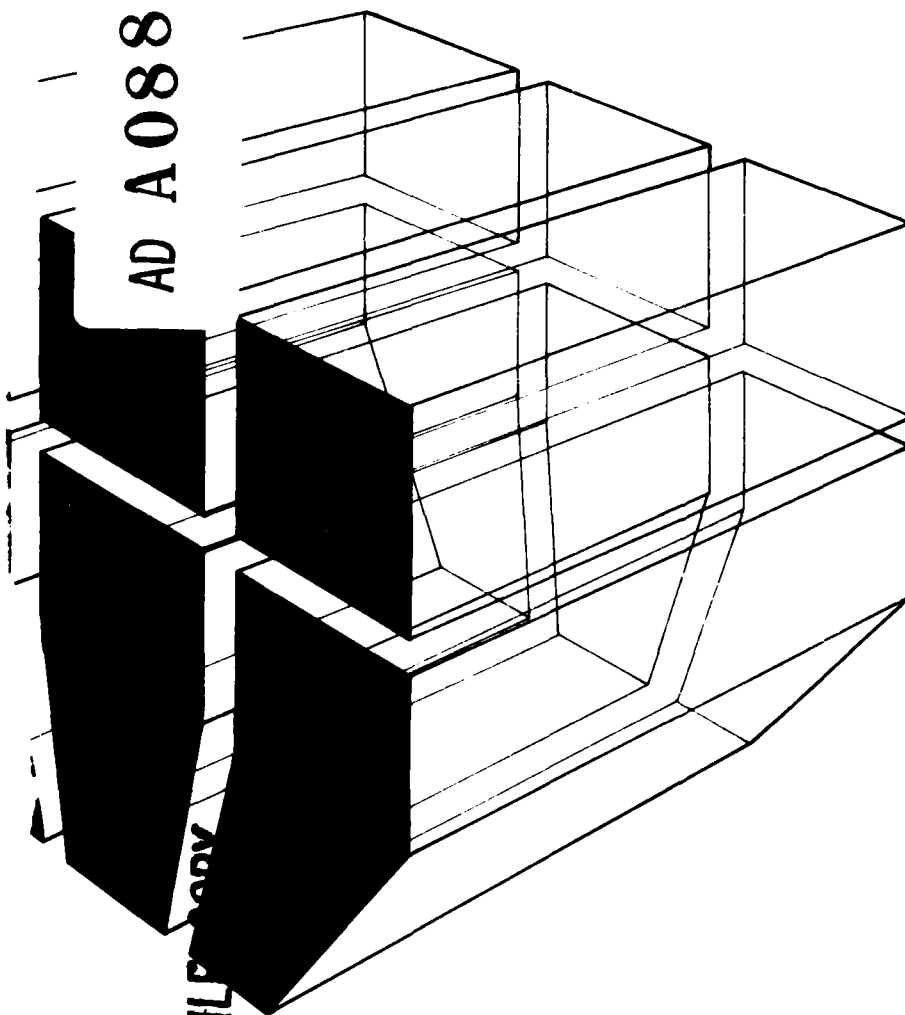

by  
R. S. Vogel  
R. J. Fileccia  
W. J. Mikucki  
R. G. Lampo



8 25 180

Approved for public release; distribution unlimited.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official indorsement or approval of the use of such commercial products. The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

**DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED  
DO NOT RETURN IT TO THE ORIGINATOR**

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER CERL-IR-N-91	2. GOVT ACCESSION NO. AD-A088268	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) IDENTIFICATION AND QUANTIFICATION OF HYDROCARBON PRODUCTS IN EFFLUENTS		5. TYPE OF REPORT & PERIOD COVERED INTERIM REPORT
7. AUTHOR(s) R. S. Vogel R. J. Fileccia W. J. Mikucki R. G. Lampo		6. PERFORMING ORG. REPORT NUMBER
9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. ARMY CONSTRUCTION ENGINEERING RESEARCH LABORATORY P.O. Box 4005, Champaign, IL 61820		8. CONTRACT OR GRANT NUMBER(s) 1703
11. CONTROLLING OFFICE NAME AND ADDRESS 12062		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 4A762720A896-02-009
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE May 1980
		13. NUMBER OF PAGES 57
		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES Copies are obtainable from National Technical Information Service Springfield, VA 22151		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) hydrocarbons waste water infrared spectroscopy gravimetric analysis		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report documents interim results of a study to (1) investigate the capability of infrared (IR) spectroscopy for the identification of specific hydrocarbon products in effluents from washracks and other vehicle service operations at Army installations, and (2) make a comparative evaluation of the Environmental Protection Agency's (EPA) gravimetric (STORET 00556) and IR (STORET 00560) methods of quantifying "total hydrocarbons" in wastewater.		

DD FORM 1473

1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

Block 20 continued.

→ Results have shown that IR spectroscopy can provide a basis for the identification of hydrocarbon products for which reference samples are available. In the initial phase of the work, a scheme of sequential discriminant analysis and pattern recognition was used with reference to a file of military specification (MIL SPEC) hydrocarbon products used in servicing wheel- and track-type Army vehicles. The complexity of IR data reduction was shown to increase rapidly with the number of hydrocarbon products present in a given sample -- a result of a similarity in the hydrocarbon components' molecular structure. The use of gas-liquid chromatography (GLC) in conjunction with IR spectroscopy provided additional discrimination and simplified data reduction.

A comparative investigation of the gravimetric vs IR methods for the quantification of "total hydrocarbons" in wastewater showed that the IR method was capable of higher precision than the gravimetric method at hydrocarbon concentrations less than 10 mg/l, and could provide information on chemical composition and consequently the origin of the hydrocarbon product. However, quantification of "total hydrocarbons" by the infrared method required greater skills and technical background of the analyst than the gravimetric method.

UNCLASSIFIED

## FOREWORD

This report was prepared for the Directorate of Military Programs, Office of the Chief of Engineers (OCE), under Project 4A762720A896, "Environmental Quality for Construction and Operation of Military Facilities"; Task Area 02, "Pollution Abatement Systems"; Work Unit 009, "Oil Pollution Control at Military Installations." The applicable QCR is 3.01.00A. The OCE Technical Monitor is Mr. W. Medding, DAEN-MPO-U.

The report was prepared by the Environmental Division (EN) of the U.S. Army Construction Engineering Research Laboratory (CERL). Dr. E. Novak is Acting Chief of EN.

COL Louis J. Circeo is Commander and Director of CERL, and Dr. L. R. Shaffer is Technical Director.

A

## CONTENTS

	<u>Page</u>
DD FORM 1473	1
FOREWORD	3
LIST OF TABLES AND FIGURES	5
1 INTRODUCTION.....	7
Background	
Objective	
Approach	
Scope	
Mode of Technology Transfer	
2 APPROACH.....	9
3 EXPERIMENTAL PROCEDURES.....	13
Sample Preparation	
Weathering Effects	
Preliminary Results	
4 GAS-LIQUID CHROMATOGRAPHY.....	27
Experimental Procedures	
Preliminary Results and Discussion	
5 QUANTIFICATION OF HYDROCARBONS IN EFFLUENTS.....	44
General	
Experimental Procedures and Observations	
Future Work	
6 CONCLUSION.....	51
REFERENCES	52
DISTRIBUTION	59



## TABLES

<u>Number</u>		<u>Page</u>
1	Hydrocarbon Products To Be Identified in Washrack Effluents	9
2	Characteristic Absorption Peaks of Hydrocarbon Products Used in Servicing Military Vehicles or Present in Effluents at Military Installations	11
3	Optimized Operating Parameters for Beckman IR-20 Infrared Spectrophotometer	14
4	GLC Operating Conditions	28
5	Hydrocarbon Reference Materials for GLC	28
6	Comparative Analytical Results Between Gravimetric and IR Determination of Hydrocarbons in Wastewater	46

## FIGURES

1	Relationship Between Performance and Instrumental Variables in IR Spectrophotometry	14
2	IR Spectrogram of 10W Oil	15
3	IR Spectrogram of 30W Oil	16
4	IR Spectrogram of 90W Oil	17
5	IR Spectrogram of GAA Grease	18
6	IR Spectrogram of Antifreeze	19
7	IR Spectrogram of Brake Fluid	20
8	IR Spectrogram of Hydraulic Fluid	21
9	IR Spectrogram of Solvent Type II	22
10	IR Spectrogram of Kerosene	23
11	GLC Chromatogram of 10W Oil Reference Material	29
12	GLC Chromatogram of 30W Oil Reference Material (Fort Lewis)	30
13	GLC Chromatogram of 90W Oil Reference Material	31

# FIGURES (Cont'd)

14	GLC Chromatogram of 30W Oil Reference Material (Fort Carson)	32
15	GLC Chromatogram of Kerosene Reference Material (Fort Lewis)	33
16	GLC Chromatogram of Kerosene Reference Material (Fort Carson)	34
17	GLC Chromatogram of Hydraulic Fluid Reference Material (Fort Lewis)	35
18	GLC Chromatogram of Hydraulic Fluid Reference Material (Fort Carson)	36
19	GLC Chromatogram of Brake Fluid Reference Material (Fort Lewis)	37
20	GLC Chromatogram of Brake Fluid Reference Material (Fort Carson)	38
21	GLC Chromatogram of Diesel Fuel Reference Material	39
22	GLC Chromatogram of Antifreeze Reference Material	40
23	GLC Chromatogram of Solvent Type II Reference Material	41
24	Chromatogram of Field Sample	42
25	IR Cell Holder for Absorption Spectra of Solutions	45
26	Reference Gauge for Determining Sample Volume for Total Hydrocarbon Determination	48

# IDENTIFICATION AND QUANTIFICATION OF HYDROCARBON PRODUCTS IN EFFLUENTS

## 1 INTRODUCTION

### Background

Operations essential to the maintenance, servicing, and washing of military wheel- and track-type vehicles generate large volumes of wastewater which contain variable concentrations of hydrocarbon products. Federal regulations require that such hydrocarbon concentrations be monitored when they are contained in effluents discharged into waterways;<sup>1\*</sup> military installations could be liable for restoration costs if environmental pollution is caused by military-generated outfalls which exceed established hydrocarbon concentration limits.<sup>2</sup>

Methods for the quantification of "total hydrocarbons" have been developed and approved by the Environmental Protection Agency (EPA); however, these methods cannot be used to identify specific hydrocarbon products.<sup>3</sup> Thus, it is difficult to track a given hydrocarbon pollutant to its source. Therefore, the U.S. Army Construction Engineering Research Laboratory (CERL) is attempting to develop a reliable method of identifying specific hydrocarbon products in washrack effluent.

### Objective

The overall objective of this study is to (1) develop methods that can be used to identify specific hydrocarbon products in wastewater from vehicular service and washrack areas at Army installations; and (2) evaluate the effectiveness of infrared (IR) spectroscopy vs gravimetric procedures for quantifying "total hydrocarbons" in wastewater.

The objective of this report is to document initial investigations into (1) and (2) above.

### Approach

This phase of the study included (1) an extensive literature search, (2) IR spectroscopy and gas-liquid chromatography (GLC) of reference materials and an actual field sample from an Army installation, (3) redesign and fabrication of experimental equipment, and (4) revisions to testing.

---

\* Superscript numbers refer to reference list beginning on page 52.

The hydrocarbon products to be included for identification in this study were limited to those products used to service and maintain military vehicles -- e.g., lubricating oils and greases, hydraulic fluids, coolants, and solvents. Also included for the purpose of identifying contributing hydrocarbon pollutant sources other than vehicular service areas were plant/animal-derived hydrocarbon types that are present in wastewaters from mess halls or other domestic activity areas.

#### Scope

The ecological scope of this study is limited to effluent streams or accumulations which potentially could find paths through surface and ground water into aquifers. The study does not include atmospheric components.

#### Mode of Technology Transfer

Research findings on the identification and quantification of hydrocarbon products in wastewater will be compiled and published as a Technical Bulletin. This research supports on-going work on the development of source control and treatment systems for wastewater discharges from Army tactical equipment maintenance operations. Facility design criteria developed and results of field evaluations will be published both as a laboratory technical report and as an Engineer Technical Letter. True technology transfer will not occur until the submitted guidance is incorporated into Design Guide DG 1110-3-80, IOE Vehicle Maintenance Complexes.

## 2 APPROACH

The value of IR spectroscopy for characterizing organic species with regard to molecular composition and structure is well known. However, the task of translating spectral information on molecular structure so proprietary hydrocarbon products in a mixture of such hydrocarbon products can be identified becomes increasingly complex as the number of constituents in the mixture increases. To limit the possible combinations of analyte variables to reasonable numbers, CERL's analytical approach was designed to be specific for and limited to the identification of hydrocarbon products used at Army vehicular services areas (Table 1).

Extensive research and development efforts by other agencies and independent groups have been directed toward methods of analytically characterizing petroleum products. A number of techniques have been used, including infrared spectroscopy,<sup>3-16</sup> absorption and fluorescence spectrophotometry,<sup>17-22</sup> GLC,<sup>16,23-41</sup> and trace-elemental analysis.<sup>5,16,42,43</sup> Reviews of recent applications of these methods are given by Bentz; Brown, et al.; Kawahara; Adlard; and Gruenfeld.<sup>7,9,32,44,45</sup>

Table 1

Hydrocarbon Products To Be Identified in Washrack Effluents

<u>Description</u>	<u>Specific Gravity</u> <u>(25°/25°)</u>
10W Oil	0.880
30W Oil	0.904
90W Oil	0.899
GAA Grease	--
Antifreeze	1.125
Brake Fluid	1.0149
Hydraulic Fluid	--
Solvent Type II	0.800
Kerosene	0.808

However, the general focus of these studies was identification of a crude oil or petroleum derivative as the single component in an accidental or clandestine marine spill. Former work in this area has not addressed itself to identifying multicomponent mixtures of hydrocarbon products.

Three methods of IR data reduction were evaluated for use in this study:

1. The multivariate statistical approach effectively used by Mattson, et al., to fingerprint a given crude oil specimen to determine its source.<sup>50</sup> However, with equipment initially available at CERL, this method was not readily adaptable to mixtures of hydrocarbon products in which the relative concentrations of the constituents were variable.

2. Linear discriminant function analysis used by Kawahara and Yang to discriminate between given specimens of a single petroleum product to identify the geographical origin of the material.<sup>51</sup> This method was also found not to be directly applicable to mixtures of proprietary hydrocarbon products.

3. Work by Vogel in identifying and quantifying trace constituents in a complex matrix by means of a limited number of appropriately chosen spectral band combinations unique to each given constituent.<sup>52</sup> This method seemed adaptable to the CERL study, and seemed likely to provide sufficient information to allow discrimination among the hydrocarbons listed in Table 1.

To test how this approach might work in practice, an "evaluation-ary" experimentation procedure was used. First, a data file of IR reference spectra from samples of nine military specification (MIL SPEC) materials obtained from the Logistics Center, Fort Lewis, WA (Table 1) and reference spectra from an animal- and a vegetable-derived oil such as those used in food preparation were recorded under controlled conditions. Table 2 summarizes a peak-by-peak log of these reference spectra. This log was searched for absorption bands at wavenumbers unique to each given hydrocarbon material. As was expected, the similarity in molecular structure of a majority of the products was reflected in both the universal occurrence of the CH<sub>2</sub> (2930/cm) band used for quantifying "total hydrocarbons," and the similarity of the majority of the other principal bands. Consequently, minor peaks were required to provide the necessary spectral information for differentiating the hydrocarbon products.

A major portion of the initial experimental work focused on optimizing the operating parameters of the available IR spectrophotometer. Such optimum parameters were essential to insure that the absorption spectra of the reference materials would be accurately recorded.

Spectral data from an unknown sample were correlated with that of standard reference materials, following a scheme of sequential

Table 2

Characteristic Absorption Peaks of Hydrocarbon Products Used in Servicing Military Vehicles or Present in Effluents at Military Installations  
(Operating Parameters Are As Listed in Table 3)

Wavenumber (cm <sup>-1</sup> )	MIL SPEC Product									
	10W Oil	30W Oil	90W Oil	Grease	Brake Fluid	Hydraulic Fluid	Anti-freeze	Solvent Type II	Kerosene	Animal Vegetable Oil
3410				M	VS		VS			
3220				M			VS			
3000										
2920	VS	VS	VS	VS	VS	VS	VS	VS	VS	W S
2850	VS	VS	VS	VS	VS	VS		VS	VS	M
2720	W	W	W	W	W	W		W	W	
1950					W	--	W			S
1745						--				S
1700	W	W	W	W	--					
1650							W		W	
1604	W	W	W							
1575				S						
1460	S	S	S	S	S	S		S	S	M
1375	S	S	S	S	S	S		S	S	
1306	W	W	W		W	W-				
1250						W+				
1230										
1165	W	W	--					W	W	M
1146						M				
1027				W			S			
1090					VS	W	M			
960			W							
890										
810	W	W	W	M					W	
785										
723		M	M	M		M		M	W	
520					S					

## Key to Relative Intensity of Absorption Peaks:

- VS transmittance less than 10%  
S transmittance between 10 and 50%  
M transmittance between 50 and 75%  
W transmittance greater than 75%

discriminant analysis and visual pattern recognition. Operations consisted of several stages of class characterization with reference to major peaks (group frequencies), followed by correlation of minor peaks by pattern recognition of intensity ratios in the unknown samples to the reference materials. By reducing the number of possible candidates in Table 1 through preliminary characterization, the probability of identifying or matching multiple components in the unknown sample with the known reference materials was enhanced. This multistage discriminant analysis approach seemed to lend itself to data reduction through either an appropriate computer program or a simple keysort card technique.



### 3 EXPERIMENTAL PROCEDURES

The Beckman Model IR-20 Infrared Spectrophotometer, used during the initial phase of this study, is an automatic-recording, filter-grating, double-beam instrument. Spectral information is presented as an analog plot of percent transmission vs wavenumber in the spectral range between 4000 to 240/cm on a formatted strip chart. Sample and reference cells used for hydrocarbon characterization were of the sealed demountable type, with Luer fittings and potassium bromide (KBr) windows spaced at a 0.05-mm path length.

Since most of the spectral information for hydrocarbon characterization would be obtained from minor peaks of greater than 75 percent transmission (while quantification of hydrocarbons would involve transmission measurement of peak and baseline values between 15 and 90 percent transmission), instrumental variables of the IR spectrophotometer needed to be critically balanced to record both major and minor peaks with minimum distortion and with high photometric accuracy and precision. To obtain this required performance, the four major instrumental variables (slit program, gain, response time, and scan rate) required systematic optimization. The interrelationship of these four variables on instrumental performance is shown in Figure 1. Optimization of these four variables involved a suitable balance between resolution, noise level, photometric accuracy, and time-related efficiency. Since an accurately represented spectrum is needed for intensity-ratio measurements (to identify hydrocarbons) and for peak height measurements (to quantify hydrocarbon concentrations), systematic efforts to establish instrumental parameters to maximize the accuracy of the recorded spectra were essential.

The procedure for optimizing the values of the instrumental parameters was an experimental one. Initial, realistically chosen values were successively refined to obtain the following performance criteria:

1. Spectral resolution of 4 to 7 wavenumbers/cm
2. Photometric distortion of 2 percent relative
3. Peak-to-peak maximum noise level of 0.5 percent transmission.

These experimentally established operating parameters, summarized in Table 3, were used as the basis for all succeeding spectral recording.

With the instrumental settings so established, absorption spectra were recorded for the nine MIL SPEC materials listed in Table 1; spectra of samples of vegetable-derived oil (safflower oil) and animal oil (lard) were also recorded. These absorption spectra are shown in Figures 2 through 10.

$$(1) \text{ Spectral Resolution } \propto \frac{E}{wNs}$$

$$(2) \text{ Noise } \propto \frac{1}{w^2 r^{1/2}}$$

$$(3) \text{ Servo Energy } \propto w^2 g$$

where E is servo loop energy

w is monochromator slit width

N is noise

s is wavenumber scan rate

r is response time

g is gain setting

Figure 1. Relationship between performance and instrumental variables in IR spectrophotometry.

Table 3

Optimized Operating Parameters  
for Beckman IR-20 Infrared Spectrophotometer

Mode:	Double beam
Spectral Range:	4000 to 250 $\text{cm}^{-1}$
Absorption Cells:	KBr plates spaced at 0.05 mm
Slit Program:	1
Gain:	6
Period:	1-second time constant
Scan Time:	240 minutes ( $17.2 \text{ cm}^{-1}/\text{min}$ )

SPECTRUM NO. 1  
 DATE 9/50-00-191-212  
 SAMPLE 10W OIL  
 SOURCE 9150-00-191-212  
 STRUCTURE \_\_\_\_\_  
 PATH 0.1 mm KBr  
 SOLVENT \_\_\_\_\_  
 CONCENTRATION \_\_\_\_\_  
 PHASE \_\_\_\_\_  
 COMMENTS \_\_\_\_\_  
 ANALYST \_\_\_\_\_  
 INFRARED  
 SPECTROPHOTOMETER


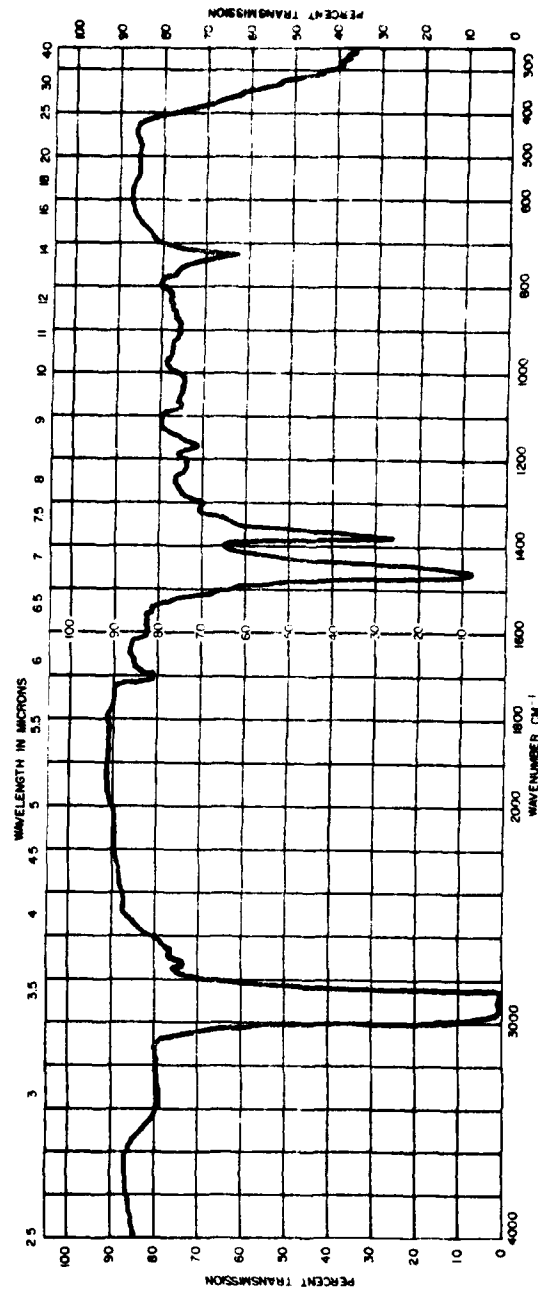


Figure 2. IR spectrogram of 10W oil.

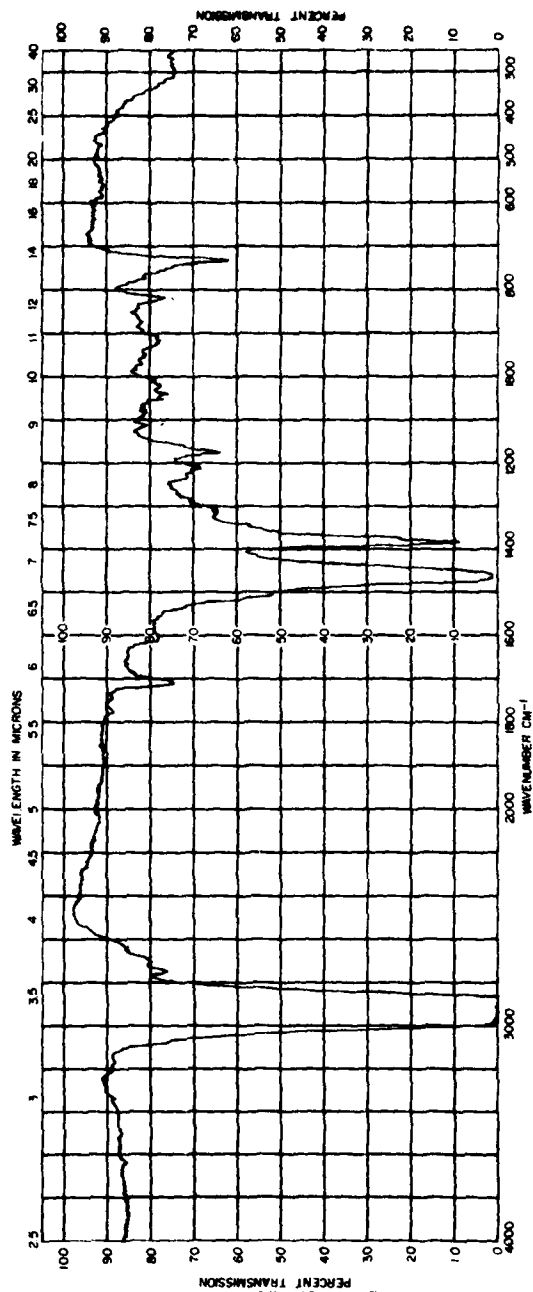

SPECTRUM NO. \_\_\_\_\_  
 DATE \_\_\_\_\_  
 SAMPLE 30 WZ  
 SOURCE \_\_\_\_\_  
 STRUCTURE \_\_\_\_\_  
 COMMENTS 545 3 RODS REF  
870 3.2"  
80C 40  
 PATH \_\_\_\_\_  
 SOLVENT \_\_\_\_\_  
 CONCENTRATION \_\_\_\_\_  
 PHASE \_\_\_\_\_  
 COMMENTS 2410 26W  
2 PRE  
6.9  
3.541  
 ANALYST \_\_\_\_\_  
 INFRARED  
 SPECTROPHOTOMETER

Figure 3. IR spectrogram of 30W oil.

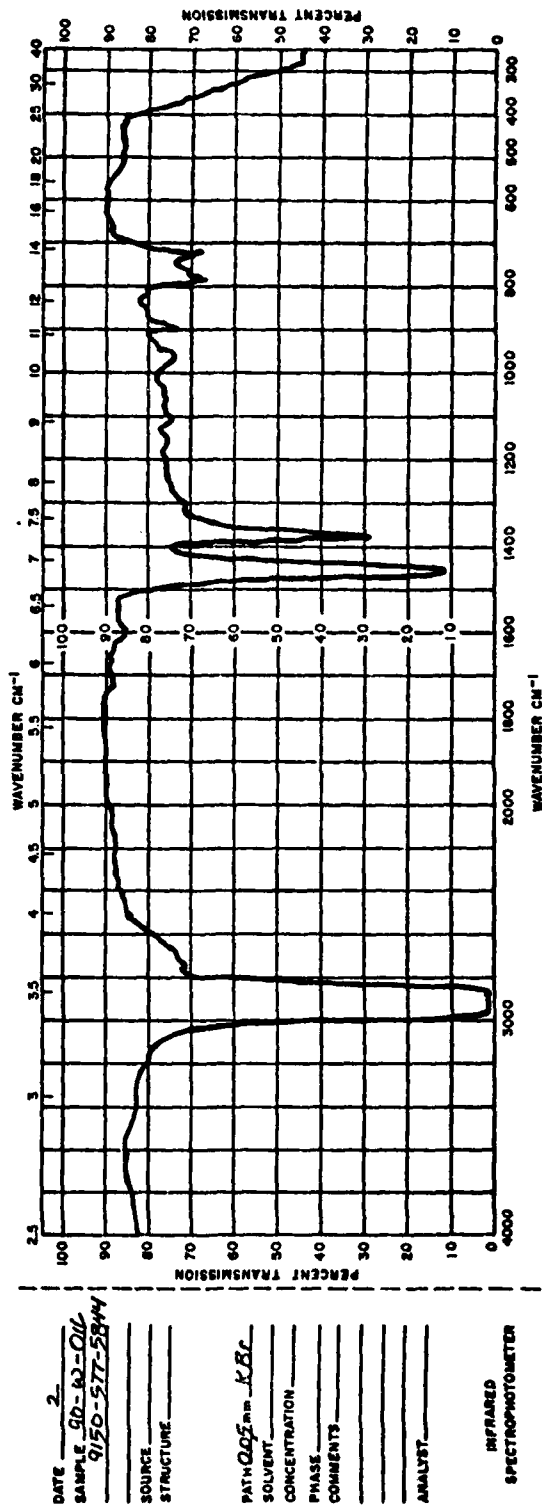


Figure 4. IR spectrogram of 90W oil.

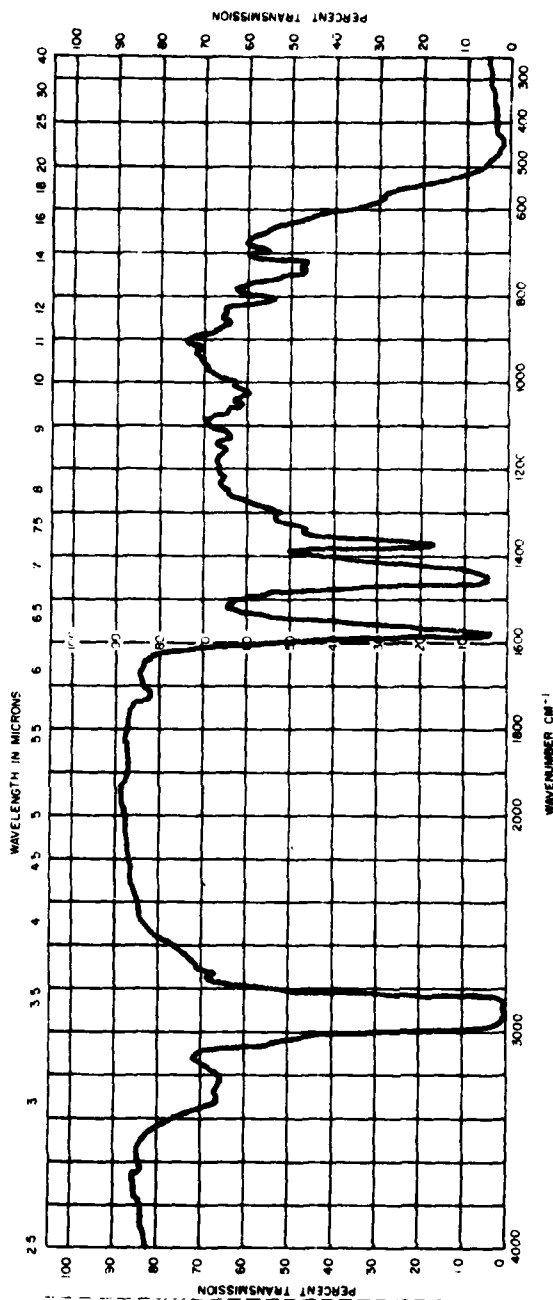


Figure 5. IR spectrogram of GAA grease.

SPECTRUM NO. 41  
 DATE 6/1/56  
 SAMPLE GAA GREASE  
 SOURCE 100-61907  
 STRUCTURE \_\_\_\_\_  
 PATH 0.025 mm 187  
 SOLVENT \_\_\_\_\_  
 CONCENTRATION \_\_\_\_\_  
 PHASE \_\_\_\_\_  
 COMMENTS \_\_\_\_\_  
 ANALYST \_\_\_\_\_

SPECTRUM NO. 5  
 DATE             
 SAMPLE ANTIFREEZE  
6493  
 SOURCE             
 STRUCTURE             
 PATH 0.02 mm KBr  
 SOLVENT             
 CONCENTRATION             
 PHASE             
 COMMENTS             
 ANALYST             
 INFRARED  
 SPECTROPHOTOMETER

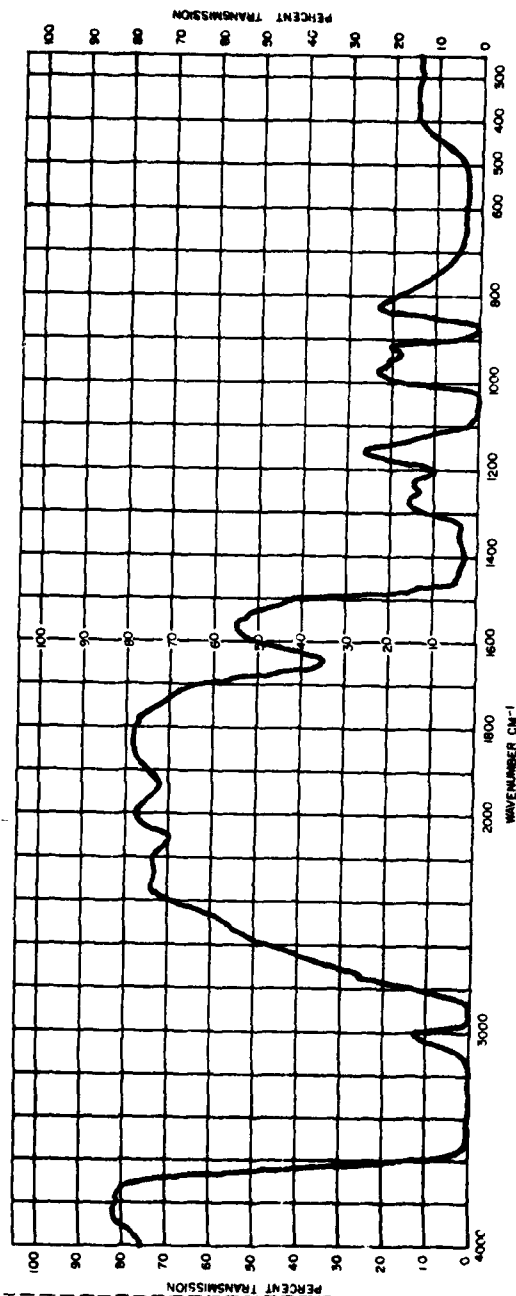


Figure 6. IR spectrogram of antifreeze.

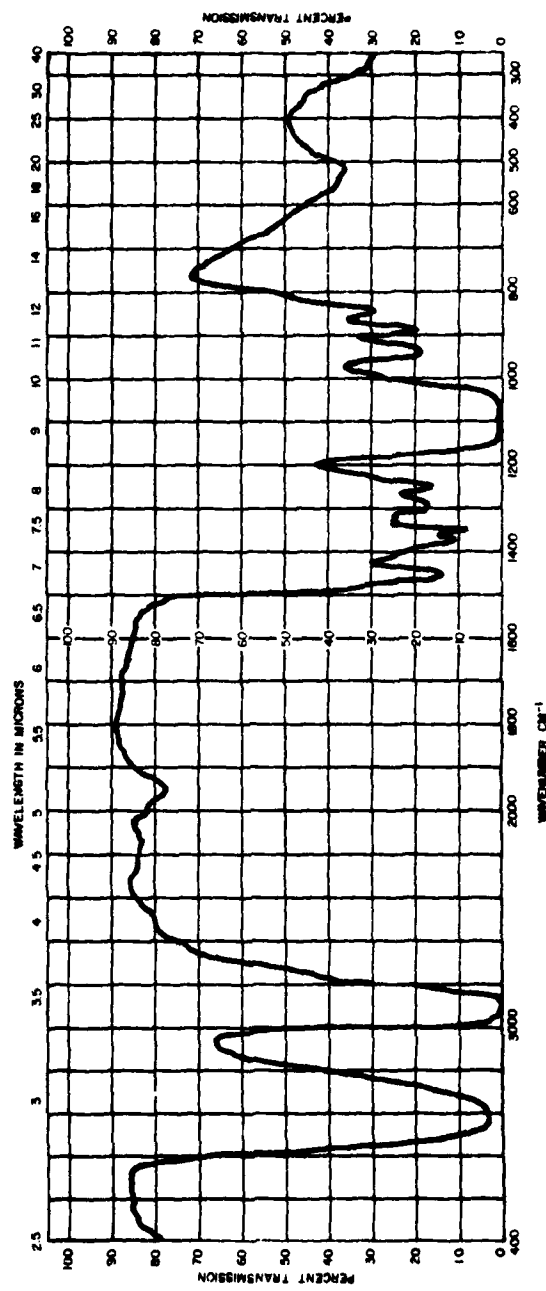


Figure 7. IR spectrum of brake fluid.

SPECTRUM NO. 6  
 DATE APR 11 1971  
 SAMPLE Brake fluid  
231-9271  
 SOURCE \_\_\_\_\_  
 STRUCTURE \_\_\_\_\_  
 PATH \_\_\_\_\_  
 SOLVENT \_\_\_\_\_  
 CONCENTRATION \_\_\_\_\_  
 PHASE \_\_\_\_\_  
 COMMENTS \_\_\_\_\_  
 ANALYST \_\_\_\_\_



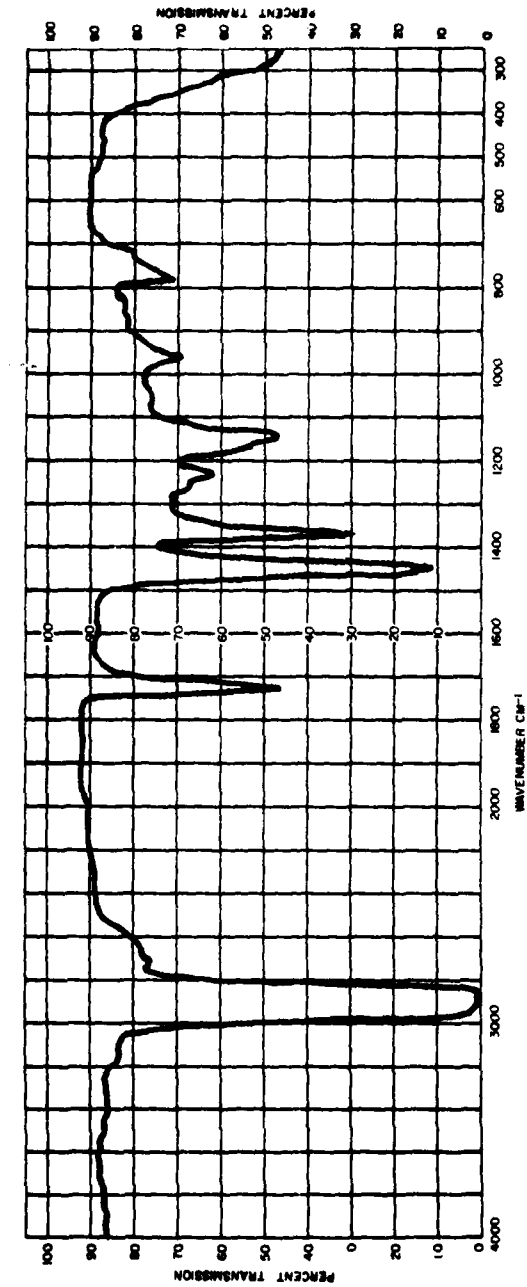


Figure 8. IR spectrogram of hydraulic fluid.

SPECTRUM NO. 7  
 DATE \_\_\_\_\_  
 SAMPLE HYDRAULIC FLUID  
3150-55-335-7000  
 SOURCE \_\_\_\_\_  
 STRUCTURE \_\_\_\_\_  
 PATH 0.5 cm 3.3  
 SOLVENT \_\_\_\_\_  
 CONCENTRATION \_\_\_\_\_  
 PHASE \_\_\_\_\_  
 COMMENTS \_\_\_\_\_  
 ANALYST \_\_\_\_\_  
 INFRARED  
 SPECTROPHOTOMETER

SPECTRUM NO. 8  
 DATE 5-17-64  
 SAMPLE SOLVENT (METHANOL)  
 SOURCE 600-637-6125  
 STRUCTURE \_\_\_\_\_  
 PATH \_\_\_\_\_  
 SOLVENT \_\_\_\_\_  
 CONCENTRATION \_\_\_\_\_  
 PHASE \_\_\_\_\_  
 COMMENTS \_\_\_\_\_  
 ANALYST \_\_\_\_\_  
 INFRARED  
 SPECTROPHOTOMETER

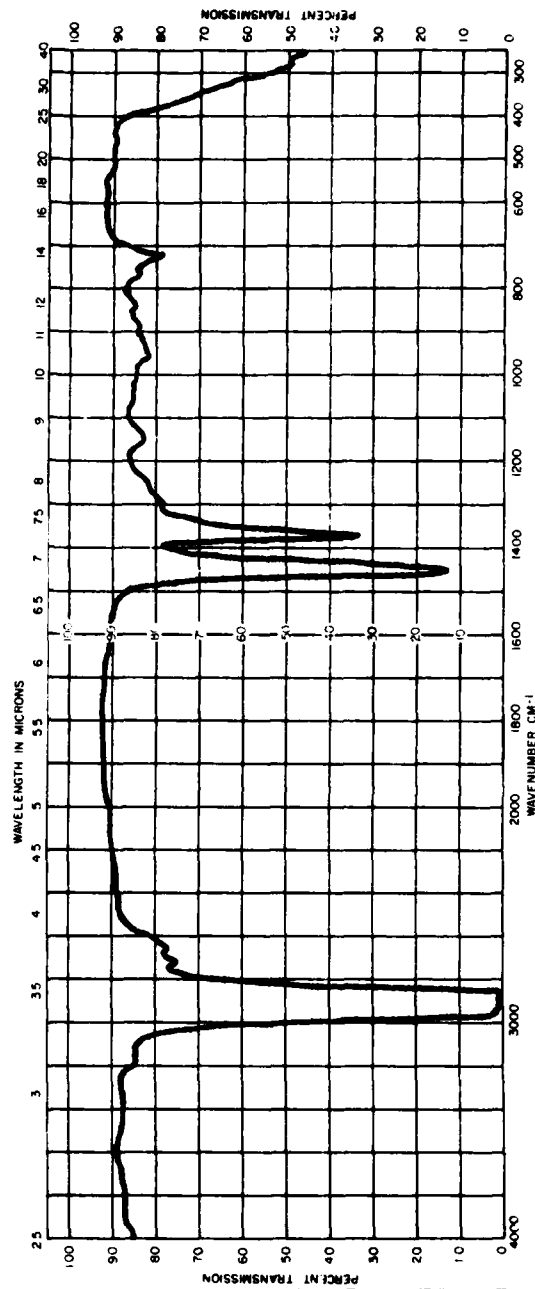


Figure 9. IR spectrogram of solvent type II.

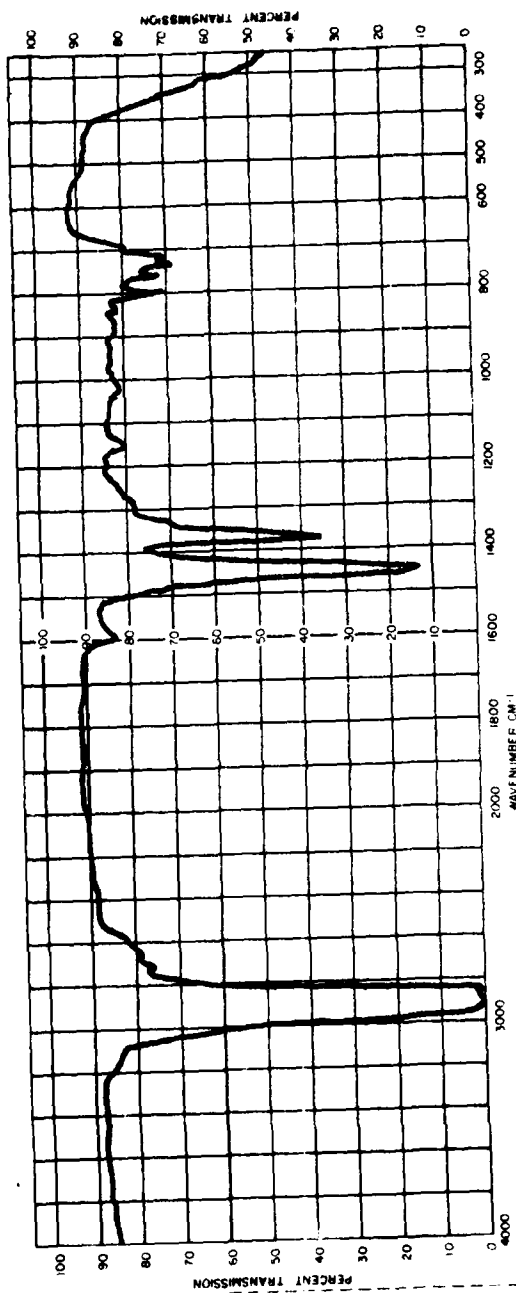


Figure 10. IR spectrogram of kerosene.

SPECTRUM NO. 9

DATE 9/40-242-0748

SAMPLE KEROSENE

SOURCE \_\_\_\_\_

STRUCTURE \_\_\_\_\_

PATH 0.05 mm. ABr.

SOLVENT \_\_\_\_\_

CONCENTRATION \_\_\_\_\_

PHASE \_\_\_\_\_

COMMENTS \_\_\_\_\_

ANALYST \_\_\_\_\_

INFRARED SPECTROPHOTOMETER

Although the recording of IR spectra is straightforward, careful attention to established operating procedures and techniques of cell manipulation was necessary to insure valid and reproducible results. To avoid cross-contamination between samples, cells were flushed with five successive 100- $\mu$ l portions of Freon 113. Cells were vacuum dried after each spectral scan. Since Luer fittings are potential reservoirs for traces of a previously contained sample, meticulous attention was paid to both external and internal surfaces of the Luer fittings and to the cell windows when cells were rinsed between samples.

It was determined that the conventional method of using a syringe to inject samples into absorption cells entailed an unacceptable risk of cross-contamination (in addition to contaminating exterior surfaces when highly volatile solvents such as Freon were used). Therefore, an improved, though unorthodox, manipulation technique was chosen. Cells were loaded using a 100- $\mu$ l Eppendorf pipette assembly; the pipette's plastic tip provided a liquid-tight connection with the capillary orifice at the base of the Luer fittings. The calibrated 100- $\mu$ l volume did overfill the 0.05-mm pathlength cell, and the disposable pipette tip insured against sample cross-contamination. The KBr cell windows remained matched within experimental error over the duration of spectral-data gathering.

#### Sample Preparation

Field hydrocarbon samples were typically skim samples consisting of an oily phase containing solid debris and occluded water overlying an aqueous phase. Since even trace amounts of water cause strong spectral interference and etch alkali-halide cell windows, complete separation of the organic phase from the aqueous phase and debris was necessary. This was accomplished on a physical basis, without the addition of solvent, by centrifugation of 2- to 5-ml portions of a sample in tapered 20-ml tubes in a clinical-type centrifuge. A portion of the supernatant organic layer was then carefully drawn off with a Pasteur pipette. The cycle was repeated until a clear organic phase was obtained. Gravity filtering of the separated organic phase through anhydrous sodium sulfate reduced the remaining traces of water to levels that could not be detected in the recorded spectra.

The conventional method of extracting the organic solvent from the original sample, followed by evaporation of the solvent, was not used because of (1) the inevitable addition of interfering solvent peaks if evaporation was performed at low temperatures, and (2) the loss of relatively volatile fractions of the organic phase if the solvent evaporation was conducted at higher temperatures. Residual solvent peaks were partially cancelled by using differential spectroscopy with pure solvent in the reference beam in a variable pathlength cell, except when the concentration of residual solvent in the sample extract required a cell pathlength less than the mechanical limit of the variable pathlength cell.

Petroleum-based oils and vegetable/animal oils in the presence of each other are quantified by evaluating infrared absorption measurements made at selected infrared frequencies specific to each class of material. In the work reported by Kahn, et al., monoglycerides, diglycerides, triglycerides, and other fatty acid esters which constitute a significant portion of the vegetable- and animal-derived oils and which are essentially absent in petroleum-derived oils, are represented at an absorption band at  $1745\text{ cm}^{-1}$  (C=O). Both petroleum and vegetable/animal-based oils absorb at a wavenumber of  $2903\text{ cm}^{-1}$ ; this measure is used in the official EPA quantification of "total hydrocarbons."<sup>54</sup>) Petroleum-based oils can be partitioned from vegetable/animal-based oils in an unknown sample before absorption measurements are made by simply contacting an oil sample dissolved in  $\text{CCl}_4$  with silica gel. Vegetable/animal-based oils are selectively adsorbed;\* the petroleum-based oils remain in solution.

#### Weathering Effects

When oils or other hydrocarbons are discharged into an aqueous effluent and are exposed to the atmosphere as emulsions or films overlying an aqueous phase, changes in physical and chemical characteristics are caused by the effects of solar irradiation, temperature, agitation, adsorption on solids, bacterial action, and chemical interaction with other chemical compounds in the effluent. This so-called "weathering" must be taken into account in analytical methods based on comparison of standard reference materials with the same components in a recovered sample that has undergone environmental exposure. The changes that occur in weathered hydrocarbons are reflected in the differences between the analytical response of a given off-the-shelf petroleum product and the same product present in a sample recovered from an effluent stream.

On the assumption that a state of equilibrium is approached in the weathering process, techniques to simulate environmental weathering have been developed. The U.S. Coast Guard, the Department of the Interior, the EPA, and others concerned with the fingerprinting of crude oil and petroleum products in marine and terrestrial environments have devoted considerable research and development effort to studies of the compositional changes caused by weathering, and to the development of techniques for simulating weathering of reference samples to compensate for the environmental weathering effect on the unknown sample.<sup>5,6,56-63</sup>

The reliability of analytical fingerprinting methods improves when synthetically weathered standards are used to identify recovered crude oil or petroleum products. Methods developed and adopted by the Energy Research and Development Agency\*\* and the American Society for Testing and Materials (ASTM) for the synthetic weathering of crude oil involve a

\* adsorbed = bound on particle surfaces.

\*\*Superseded in 1977 by the Department of Energy.

distillation (under reduced pressure) of the suspect and recovered oil samples, and collection of the 275°C (atm) fraction; this fraction is then analyzed.<sup>17,22</sup> This distillation technique rejects the light fractions of petroleum components having n-paraffin carbon numbers of 15 or less. This loss of the low carbon-number fraction does not hinder the identification of crude oils containing a homologous n-paraffin series extending to C<sub>40</sub> or more. However, such synthetic weathering methods may be unsuited to the synthetic weathering of recovered samples that may contain diesel fuel, solvent, and other light hydrocarbon products such as might be encountered in effluent streams at Army installations. More applicable synthetic weathering techniques must be found so environmental weathering can be simulated without extensive loss of low-boiling hydrocarbons. Ultraviolet irradiation and aeration of standard reference materials at temperatures below 40°C offer potentially useful alternatives.<sup>4,8,54</sup>

### Preliminary Results

Two effluent stream samples were analyzed by IR spectroscopy through spectral correlation of absorption peaks with those of the known reference materials listed in Table 2, using discriminant analysis and pattern recognition of analog data. In a field sample (a contaminated outfall sample from Flora Road outfall, Fort Lewis, WA), two constituents -- motor lubricating oil and diesel fuel or kerosene -- were identified by IR spectroscopy and confirmed by GLC as the principal hydrocarbon products present. Other minor peaks only slightly above threshold intensity were observed, but were not sufficiently defined to be analytically useful, since the Beckman IR-20 Spectrophotometer did not have the capability for scale expansion in the analog presentation of absorption values. Facilities for scale expansion and analog-to-digital data conversion would be required for accurate representation of minor peaks and for peak-rationing techniques.<sup>64</sup>

#### 4 GAS-LIQUID CHROMATOGRAPHY

Over the past 10 years, GLC has gained a prominent place in analytical methods which fingerprint crude oil samples recovered from oil spills.<sup>60</sup> This has been due, in part, to the unique ability of GLC to differentiate between hydrocarbon species having similar structures. Petroleum crudes have a predominant component of n-paraffin hydrocarbons in an homologous series of carbon numbers to C<sub>40</sub> or more. The chromatogram of a typical crude petroleum sample is characterized by a periodic sequence of approximately equally spaced peaks representing unit increments in carbon numbers of the n-alkanes contained in the given sample. The relative concentration of each n-alkane is a function of the area under the corresponding peak; information about peak height distribution of the respective n-alkanes allows recovered crude oil samples to be matched to known reference samples of the suspect petroleum.<sup>64</sup>

GLC was used during this study to complement IR spectroscopic techniques. The GLC carbon-number criterion made it possible to identify both the low-boiling n-paraffin fractions (carbon numbers less than 11) which characterize kerosene and diesel fuel and the higher-boiling n-paraffin fractions which constitute motor lubricating oils. However, weathering of n-paraffin series hydrocarbons results in partial loss of lower-boiling components; this loss is reflected in an attenuation or absence of the lower carbon-number peaks. As in the case in IR measurements, weathering effects must be taken into account when chromatographic data on field samples are interpreted.

##### Experimental Procedures

GLC information was collected using a Hewlett-Packard 5754 Gas-Liquid Chromatograph equipped with temperature programming and a flame ionization detector. Data output was through a Hewlett-Packard 3380A recording integrator which provided (1) an analog plot of the chromatogram (with retention times at each recorded peak), and (2) a table of the respective peak areas as percent of the total (for quantifying individual molecular species).

Optimum GLC operating conditions were established by experimenting with various liquid phases and values of instrumental parameters with respect to the sample materials to be analyzed (Table 4). Although other liquid phases might have given equal performance, Dexsil 300 was chosen for its thermal stability and its capability to provide reasonable resolution of peaks in a real-life sample.

After these analytical conditions were established, chromatograms were obtained from the 13 reference materials listed in Table 5. The recorded chromatograms appear in Figures 11 through 23.

Table 4

## GLC Operating Conditions

Instrument Type:	Hewlett-Packard 5754
Detector:	Flame ionization detector
Injection Port Temperature:	250°C
Detector Temperature:	300°C
Column:	365-m x 3.2-mm stainless steel column packed with 6 percent Dexsil 300 on 80/100-mesh Chromosorb WHP
Column Oven Temperature:	Programmed from 70 to 325°C at 4°C/minute. Held at 325°C
Carrier Gas and Flow Rate:	Helium at 30 cc/minute
Electrometer Range:	10 <sup>5</sup>
Chart Speed:	0.5 cm/minute
Sample Volume Injected:	1 to 5 µl as required

Table 5

## Hydrocarbon Reference Materials for GLC

<u>Reference Sample</u>	<u>Source</u>
10W Oil	Fort Lewis
30W Oil	Fort Lewis
90W Oil	Fort Lewis
30W Oil	Fort Carson
Kerosene	Fort Lewis
Kerosene	Fort Carson
Hydraulic Fluid	Fort Lewis
Hydraulic Fluid	Fort Carson
Brake Fluid	Fort Lewis
Brake Fluid	Fort Carson
Diesel Fuel	Fort Carson
Antifreeze	Fort Lewis
Solvent Type II	Fort Lewis



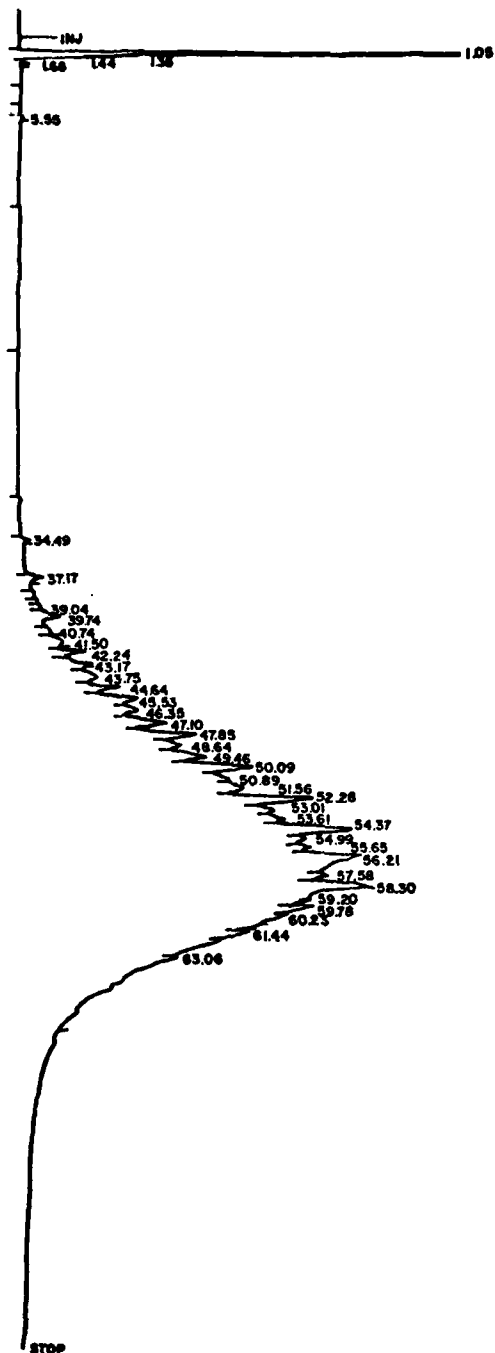


Figure 11. GLC chromatogram of 10W oil reference material.

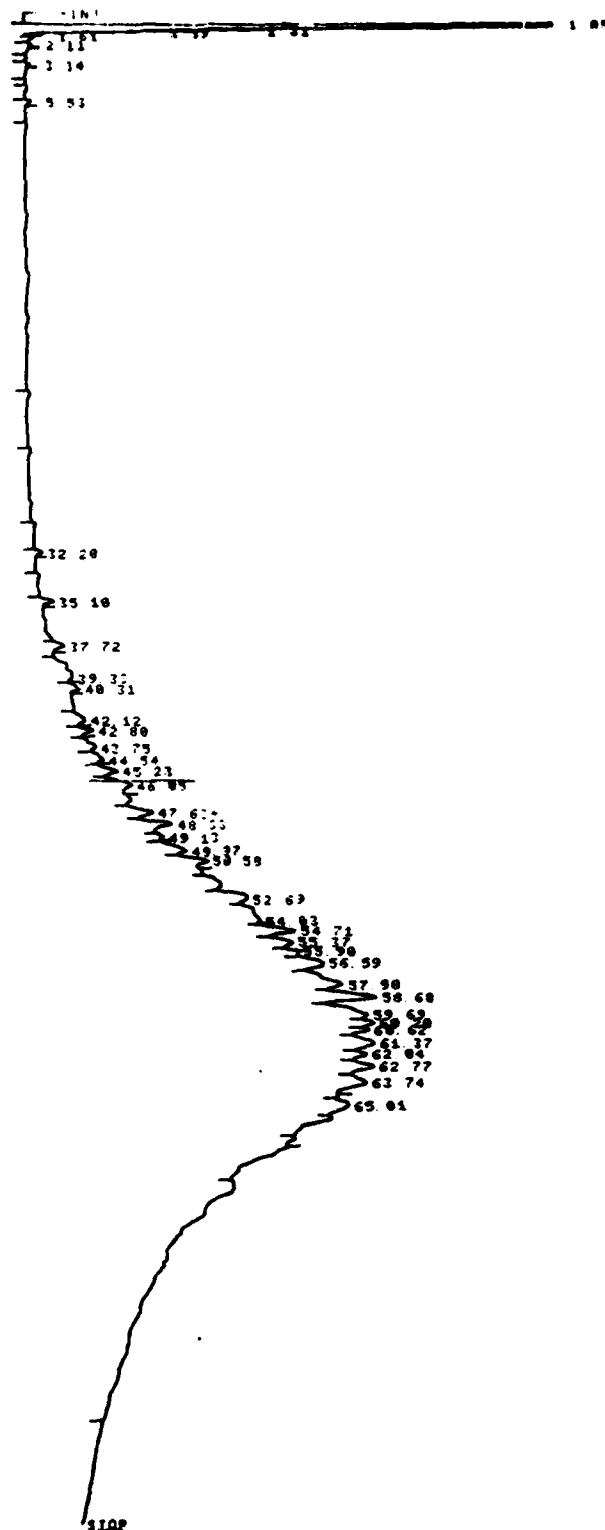


Figure 12. GLC chromatogram of 30W oil reference material (Fort Lewis).

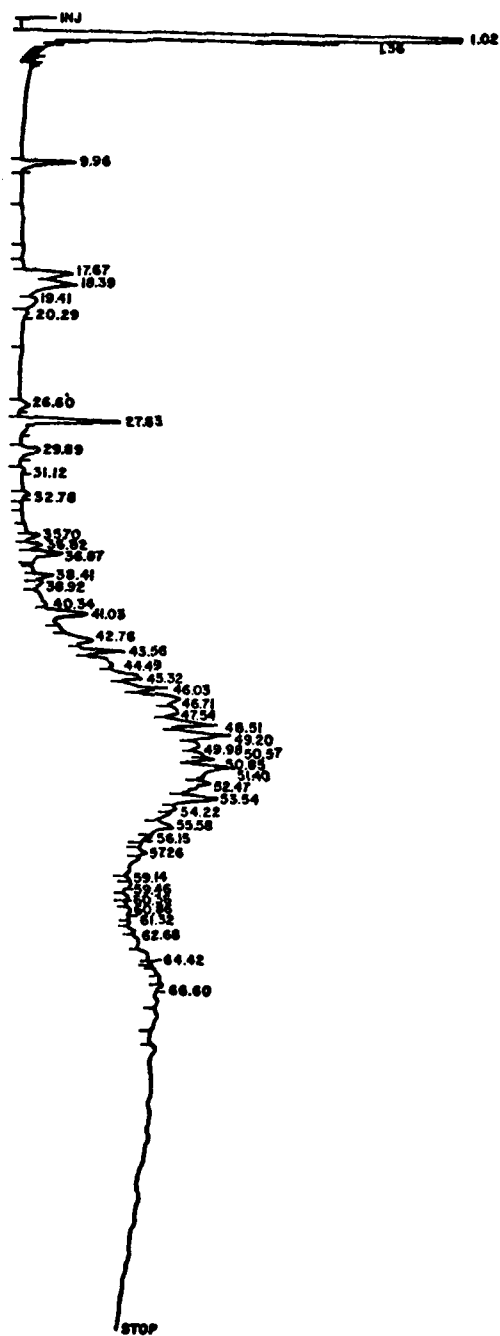


Figure 13. GLC chromatogram of 90W oil reference material.

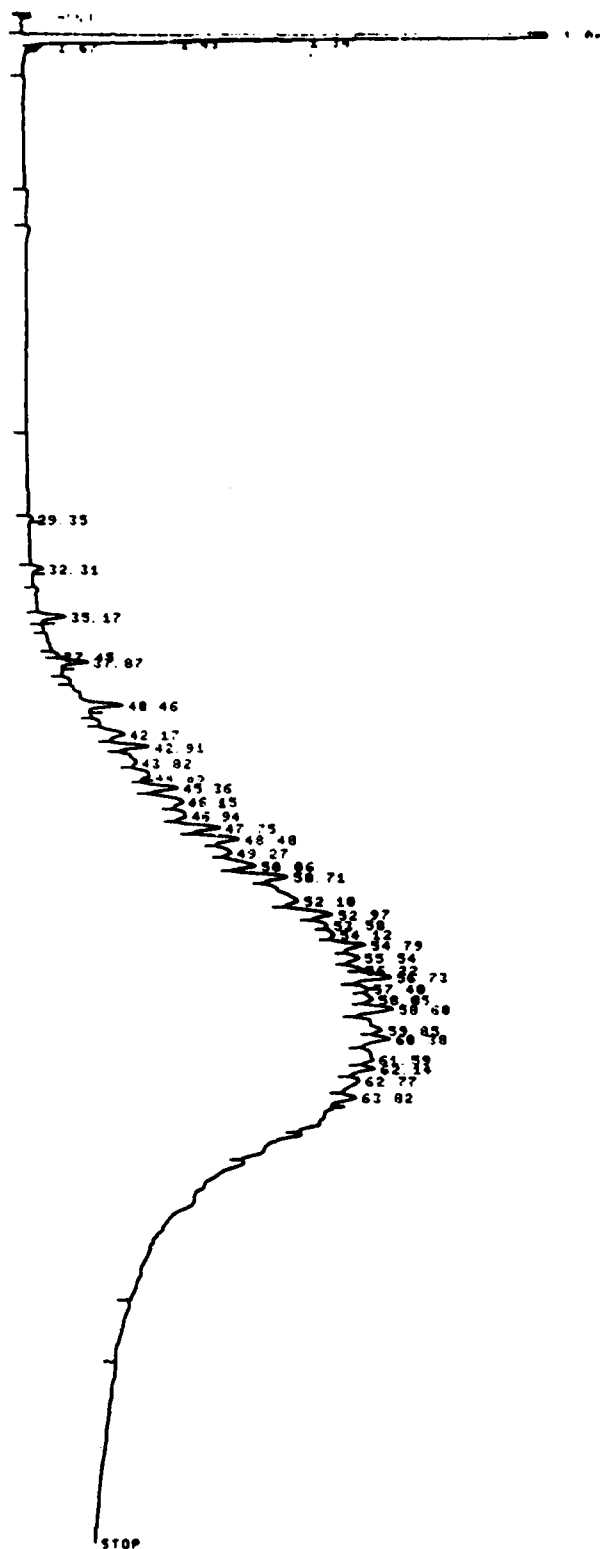


Figure 14. GLC chromatogram of 30W oil reference material (Fort Carson).

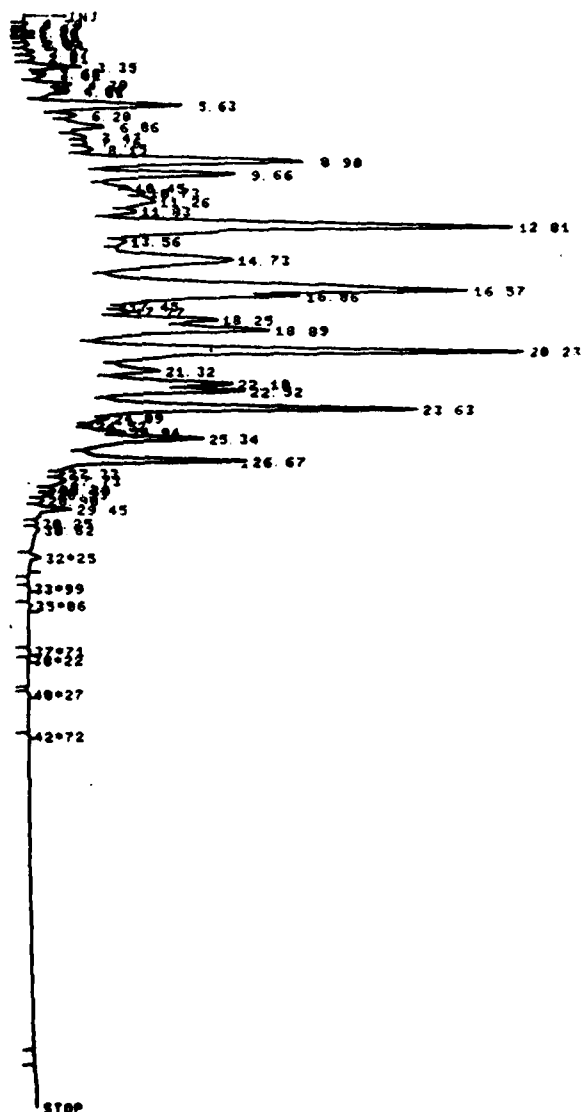


Figure 15. GLC chromatogram of kerosene reference material (Fort Lewis).

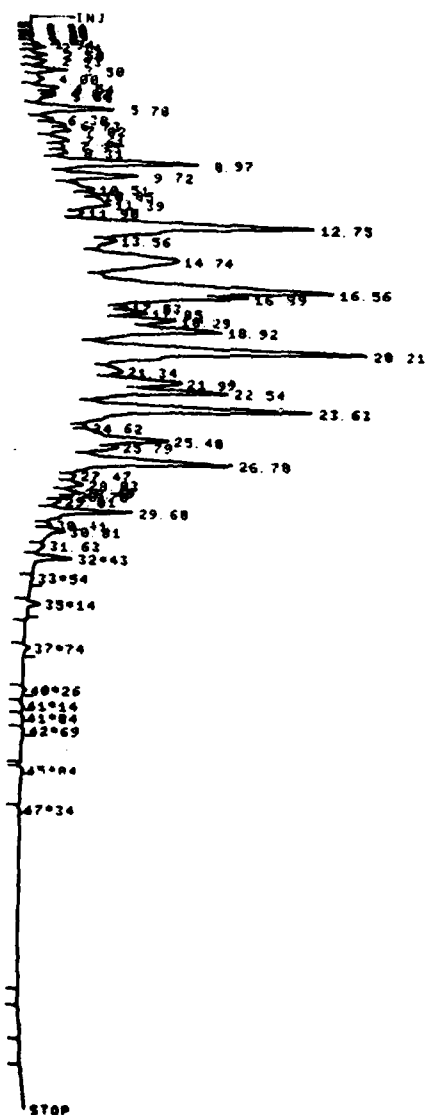


Figure 16. GLC chromatogram of kerosene reference material (Fort Carson).

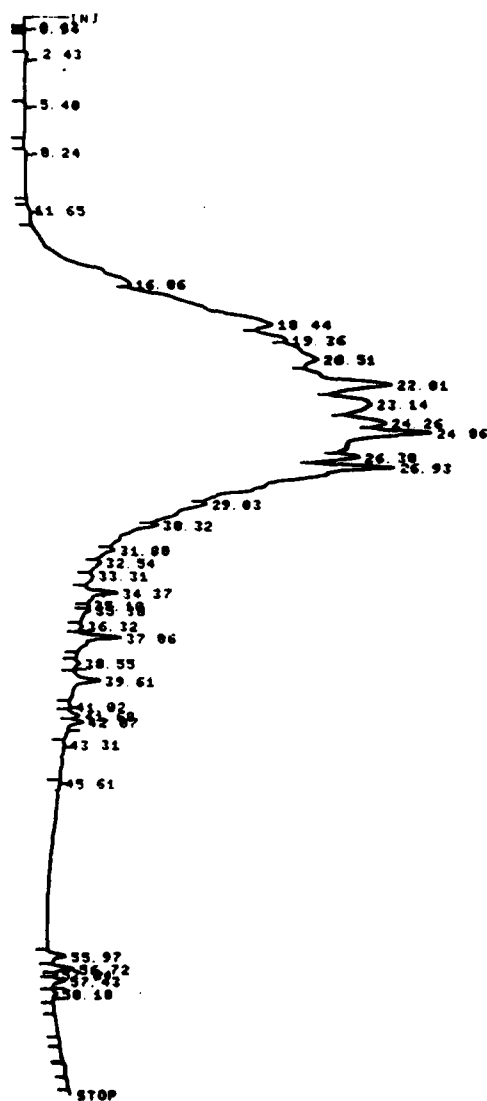


Figure 17. GLC chromatogram of hydraulic fluid reference material (Fort Lewis).

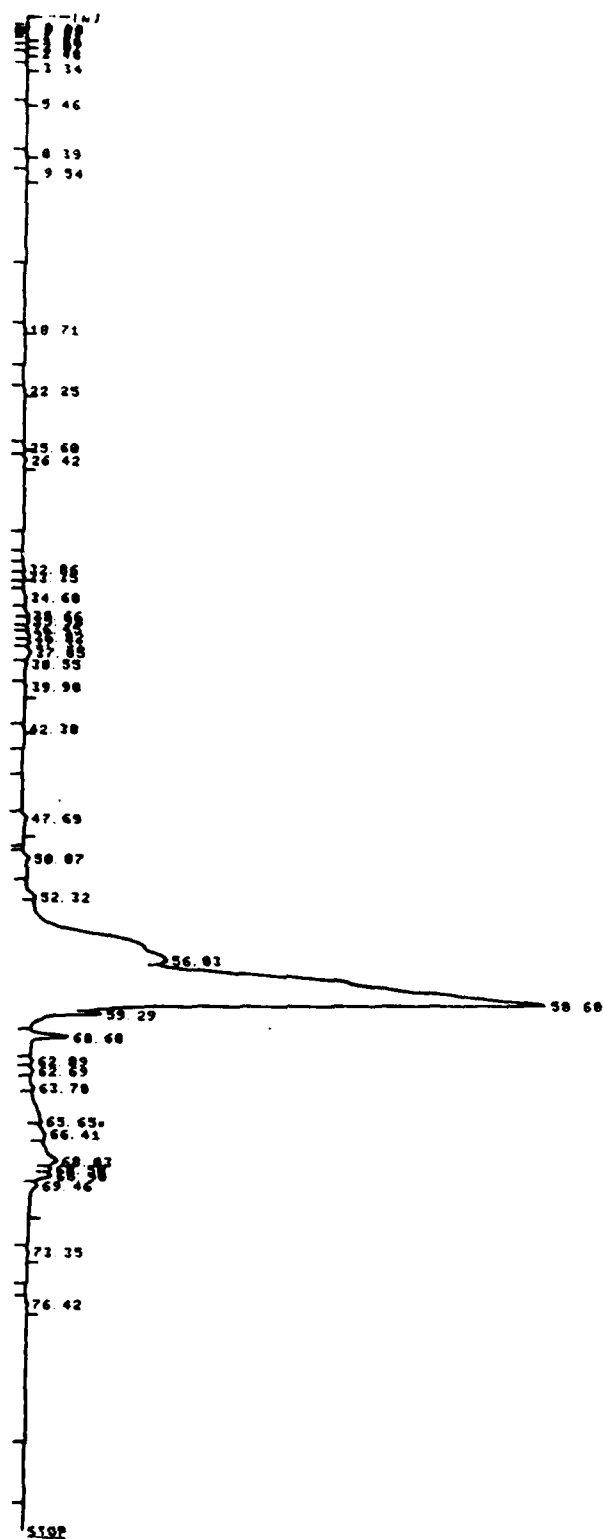


Figure 18. GLC chromatogram of hydraulic fluid reference material (Fort Carson).



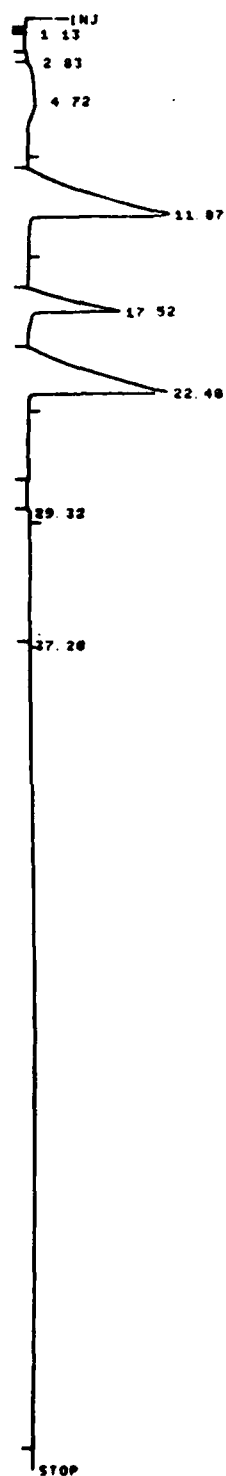


Figure 19. GLC chromatogram of brake fluid reference material (Fort Lewis).

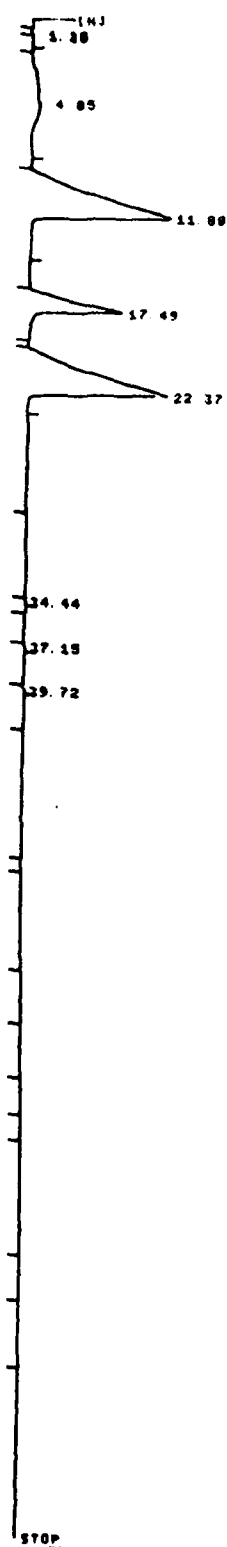


Figure 20. GLC chromatogram of brake fluid reference material (Fort Carson).

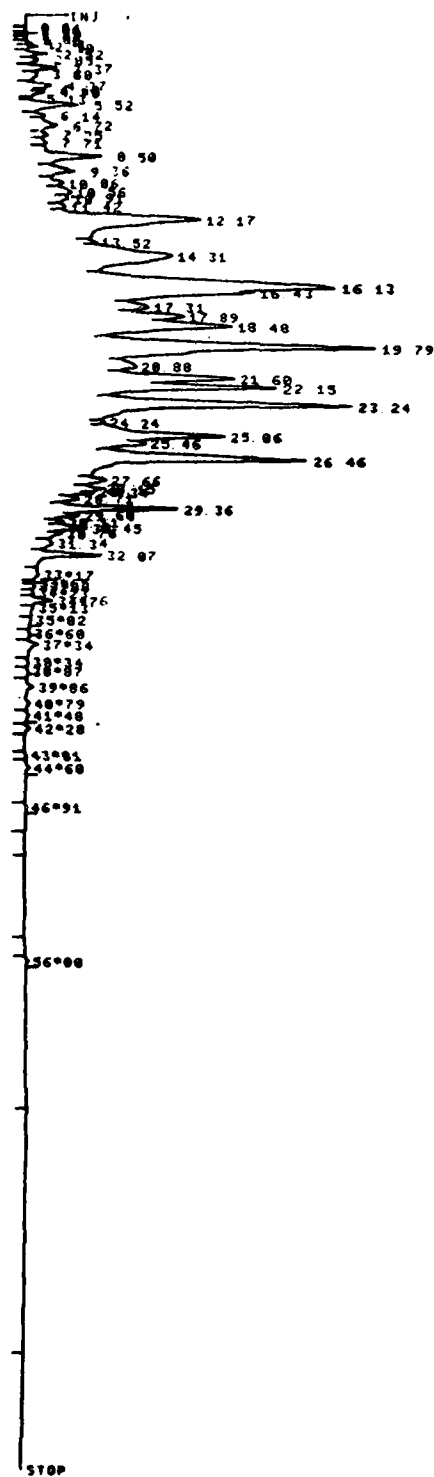


Figure 21. GLC chromatogram of diesel fuel reference material.

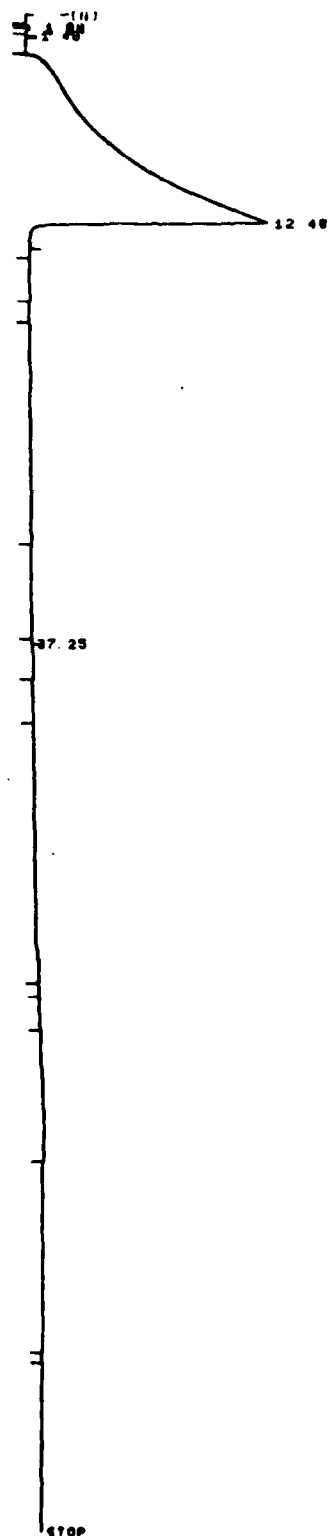


Figure 22. GLC chromatogram of antifreeze reference material.

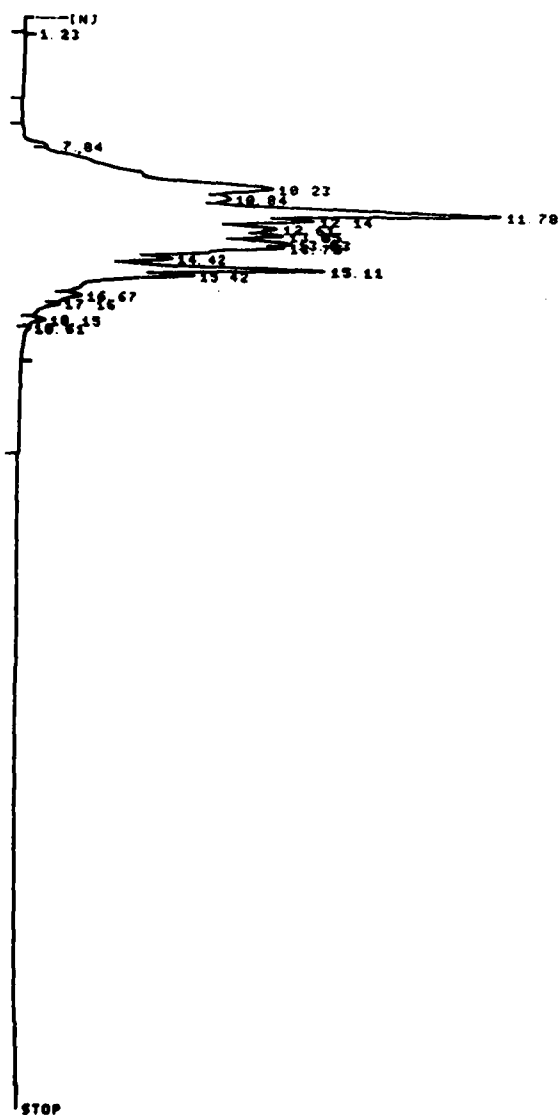


Figure 23. GLC chromatogram of solvent type II reference material.

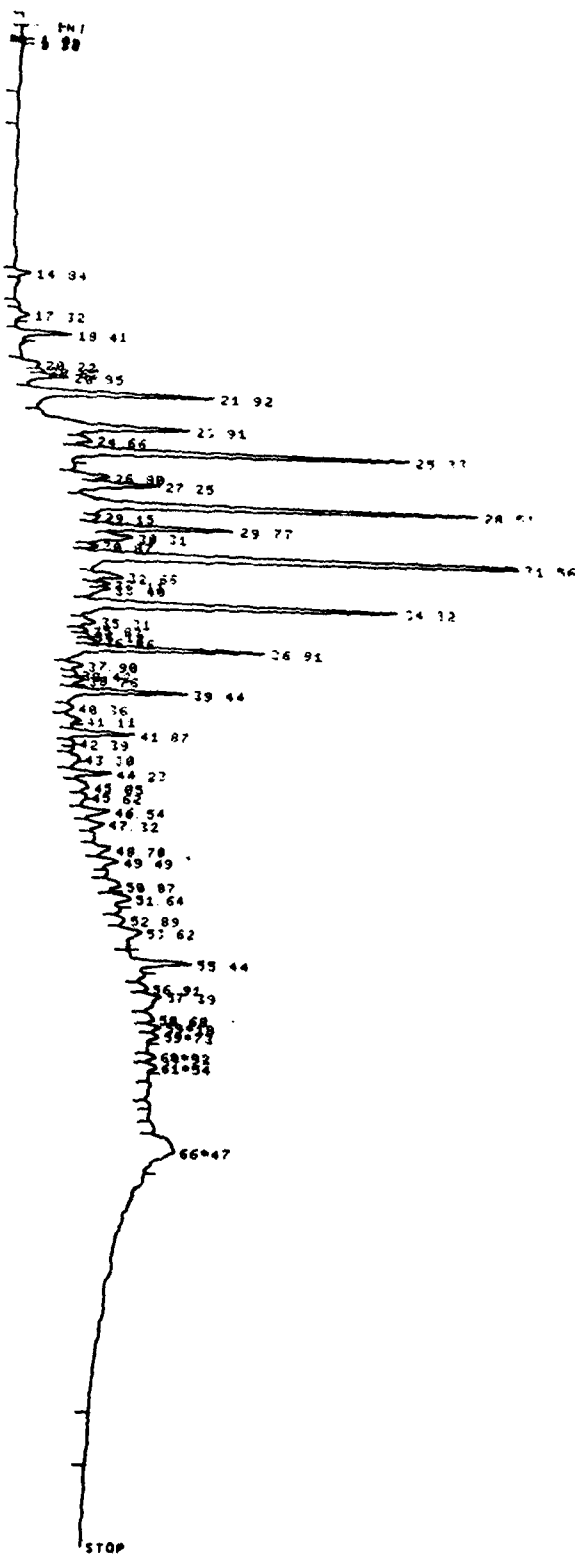


Figure 24. Chromatogram of field sample.

## Preliminary Results and Discussion

At this phase of the study, visual pattern-recognition was used to categorize component classes. The presence of n-alkane homologous series was apparent in the kerosenes and lubricating oils in which the well-defined series of peaks are superimposed on an "unresolved envelope."<sup>61</sup> The lower carbon-number distributions in the kerosenes (with respect to the lubricating oils) were correlated to the respective boiling point ranges of the kerosene and motor-oil products. The dissimilarity between Fort Carson and Fort Lewis hydraulic fluid chromatograms denote different chemical compositions, although, according to MIL SPECS, the physical properties of these substances are the same. The brake fluid samples from the Fort Carson and Fort Lewis stores produced similar chromatograms, indicating that they had the same chemical formation. The "tailing" of the last three eluted peaks indicates highly polar compounds such as glycols or higher alcohols. The absence of the periodic-peak series of the n-alkanes in the chromatogram of solvent type II indicates it is not composed of n-paraffin hydrocarbons.

The field sample was used to test the analytical interdependence of GLC in combination with IR spectroscopy. The GLC operating conditions used in the preliminary tests on this sample were as given in Table 4, except that temperature programming was between 100 and 325°C at a ramp rate of 10°C per minute.

The outfall sample chromatogram (Figure 24) had a periodic series of peaks, indicating an homologous series which corresponded to the n-paraffin series in kerosene. Subsequent analysis by GLC/mass spectroscopy confirmed these peaks to be an homologous series of n-alkanes ranging from C14 to C24. The attenuation or absence of peaks for carbon numbers less than 12 in the field sample chromatogram (as compared to peaks of carbon numbers less than 8 in the reference sample of kerosene) indicated the expected losses of these lower-boiling n-alkanes through evaporation in the weathering process.

Since a sophisticated data-reduction system which would generate specific compound information was not available, GLC chromatogram patterns were visually screened to establish what classes of organic compounds may or may not be present. This step simplified the interpretation of IR spectra when the two techniques were used together, since a preliminary GLC screening reduced the population of probable components in a mixture of hydrocarbon products.

## 5 QUANTIFICATION OF HYDROCARBONS IN EFFLUENTS

### General

The determination of oils and other hydrocarbons in effluents at military installations can provide information essential to the monitoring and control of environmental pollution by these substances.

CERL used the official EPA gravimetric method (STORET 00556) to determine "total hydrocarbons" in wastewater. This method is based on the weight of the residue on evaporation of a Freon extract of a given volume of a wastewater sample. Analytical results are expressed as milligrams of oil per liter. The stated analytical range is 5 to 1000 mg/l.

An alternate EPA method (STORET 00560) uses IR spectroscopy and is based on the linear relationship of optical absorbance by the  $\text{CH}_2$  band at 2930/cm, with concentration of the hydrocarbon.<sup>65</sup> The measured absorbance of a Freon extract of the sample is converted to concentration of "total hydrocarbons" in the original sample by means of an analytical curve prepared from absorption measurements of prepared standards of known concentrations of a standard oil in Freon. The analytical range is 0.1 to 40 mg/l with conventional absorption cells. The upper limit can be extended several orders of magnitude by volumetric dilution of the Freon extract.

The EPA method using IR spectroscopy can provide information on composition as well as concentrations of the hydrocarbons, and therefore might be more appropriate in some cases than the nonselective gravimetric method.

Before CERL could evaluate the overall benefits and limitations of the IR and gravimetric methods with regard to precision, accuracy, procedural characteristics, and applicability to routine use, the Beckman IR-20 Infrared Spectrophotometer had to be retrofit with quartz-window cells of 1-, 10-, and 50-mm pathlengths for absorption measurements of solutions. The necessary cell holders of the dimension stability required for this purpose were not commercially available, and so prototypes were made at CERL (Figure 25). These prototypes were designed to accommodate the range of cells needed for both the initial phase of this study, and for planned investigations into low concentrations of hydrocarbons that would require relatively long pathlength cells.

Next, a "hands on" stepwise execution of the EPA IR procedure was conducted; critical attention was paid to procedural details of preparing and calibrating standards, development of the analytical curves, sample preparation, extraction techniques, absorption measurement methods, data reduction, and calculations.



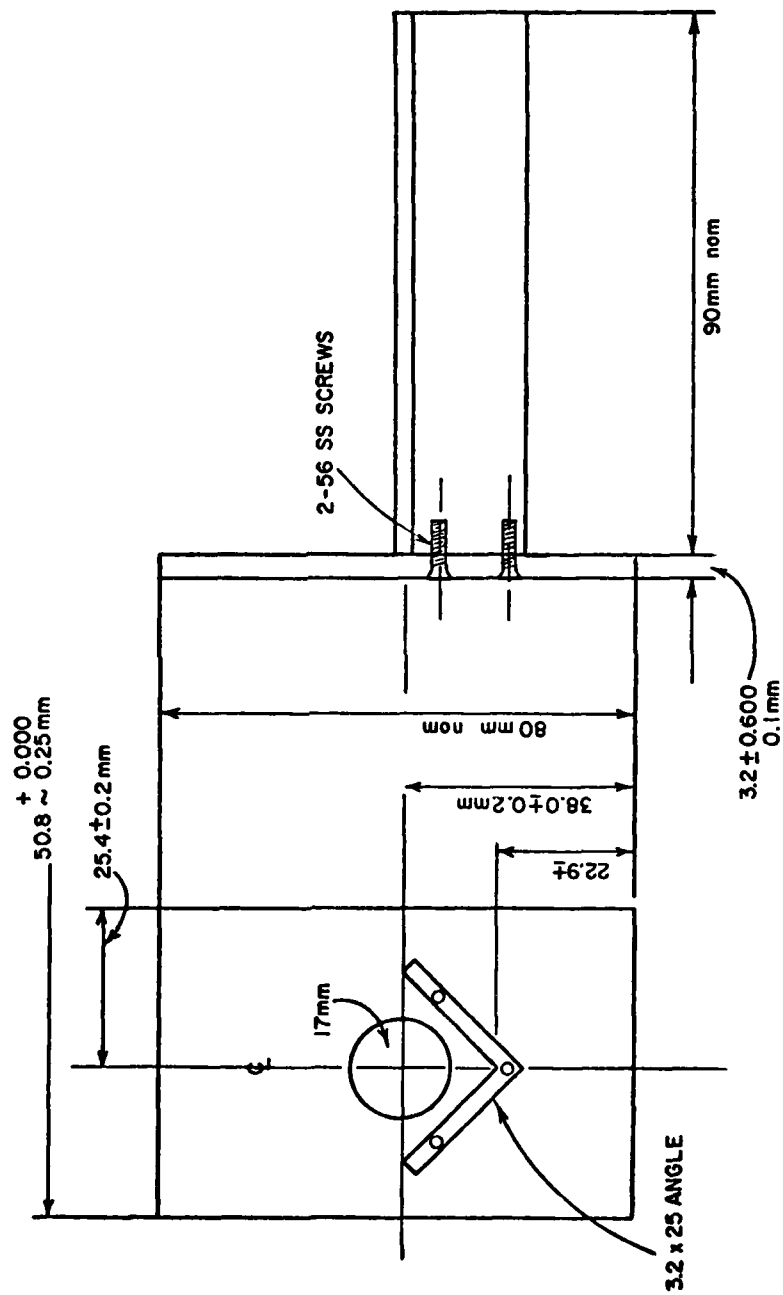


Figure 25. IR cell holder for absorption spectra of solutions.

The EPA IR method was then applied to the determination of hydrocarbons in a representative group of wastewater samples previously analyzed by the gravimetric method. Comparative results of the initial group of samples are listed in Table 6.

After a sufficient number of analytical results are accumulated (during the second phase of this study), these data will be analyzed and correlation statistics will be computed to assess bias between the IR and gravimetric methods. Accuracy and precision of the IR and gravimetric methods will be assessed through the use of synthesized wastewater samples containing known concentrations of the MIL SPEC hydrocarbon products (Table 1).

#### Experimental Procedures and Observations

The procedural details of the EPA IR method follow the solvent extraction and IR techniques used in the petroleum industry for monitoring refinery wastes and effluents.<sup>46</sup> Acidification of the sample to pH 2

Table 6

Comparative Analytical Results Between  
Gravimetric and IR Determination of  
Hydrocarbons in Wastewater

<u>Sample Number</u>	<u>Concentration (mg/l)</u>	
	<u>Gravimetric Method</u>	<u>IR Method</u>
FB-4a	10.2	11.5
FB-4b	2.0	8.2
FB-5	11.0	9.5
FB-6	9.7	11.9
FB-8	5.6	6.1
FB-10	1.0	1.9
FB-15	21.5	23.5
FB-18	32.7	32.0

\*Standardized with reference to 30W MIL SPEC motor oil.

or less with sulfuric acid at the time of sampling arrests biochemical changes and increases hydrocarbon extraction efficiency.<sup>49</sup> The use of Freon 113 as the extractant to replace the previously used carbon tetrachloride was a result of increased awareness during recent years of toxic substances, rather than for chemical reasons. The slight inconvenience of using the more volatile Freon 113 instead of carbon tetrachloride is compensated by the 100-fold lower toxicity of Freon relative to carbon tetrachloride.

The cell holder design shown in Figure 26 provided accurate and reproducible alignment of cylindrical cells of 1 to 10 cm pathlength with the optical axis of the Beckman IR-20 spectrometer. Precisely machined v-ways were used instead of conventional clamping devices to maintain accurate and reproducible positioning of the cells. This permitted convenient access for cell-filling operations and minimized mechanical stresses on the cells during their placement and removal.

In the selection of hydrocarbon compounds for preparation of the reference "oil" standard, the EPA IR procedure categorized hydrocarbons into two groups:

1. Known oils. These are oils in which the composition of the hydrocarbon material in the wastewater is known and a sample of the material is available for preparation of calibration standards.

2. Unknown oils. These are oils for which a sample of the material is not available for the preparation of standards.

In unknown oils, a hydrocarbon mixture consisting of 37.5 percent n-hexadecane, 37.5 percent isooctane, and 25 percent benzene (volume/volume basis) is given as the calibration material. However, the 0.769 specific gravity of that mixture is considerably less than the 0.900 average specific gravity of hydrocarbon products listed in Table 1 that might be present in washrack effluents, and consequently, would introduce a systematic error of approximately +18 percent in the analytical results. Therefore, it was decided to prepare calibration standards from a material of approximately 0.900 specific gravity. A MIL SPEC 30W motor oil with a 0.904 specific gravity was selected as the standard material; calibration standards were prepared over the range between 0.5 and 40 mg/l.

Oil calibration standards were prepared according to conventional practices for serial dilutions of the MIL SPEC 30W motor oil with Freon 113. To minimize evaporation losses, the prepared standard series were stored in volumetric flasks sealed with latex caps over ground glass stoppers. Absorption spectra of the standards in the region of the 2930/cm band were recorded using the integral strip-chart recorder of the Beckman IR-20.

Data reduction required the conversion of the percent transmission readout of the IR-20 to absorbance. This was done graphically by means

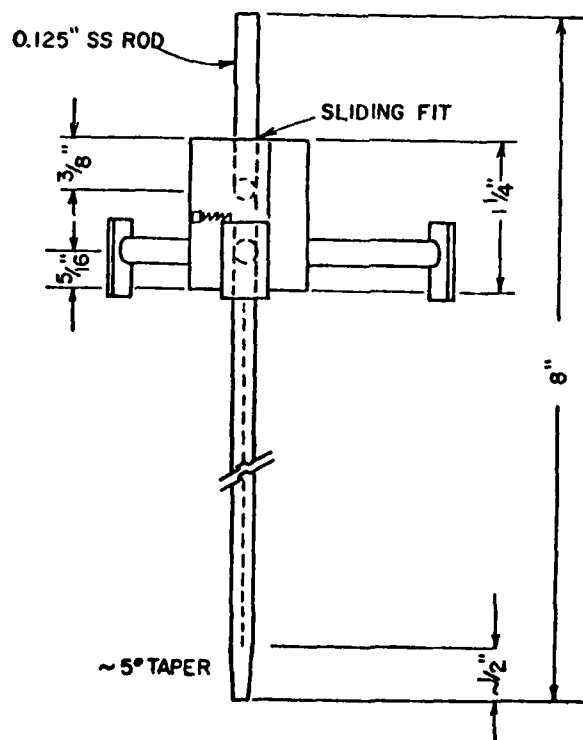
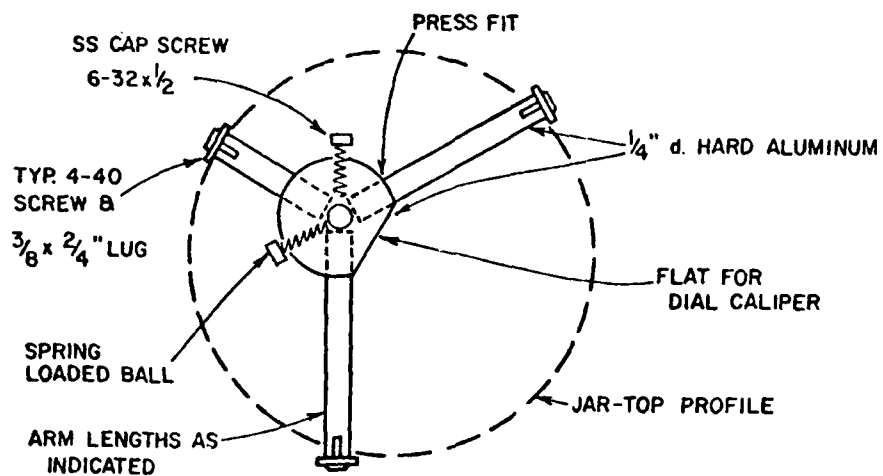


Figure 26. Reference gauge for determining sample volume for total hydrocarbon determination.

of a linear-function plot of percent transmission vs absorbance (%T vs A) on semilog paper, with absorbance on the linear axis and percent transmission on the logarithmic axis. The plotted intercepts were transmission = 100 vs absorbance = 0 ( $T = 100$  vs  $A = 0$ ), and transmission = 10 vs absorbance = 1 ( $T = 10$  vs  $A = 1$ ). Peak-height absorbance values were obtained from the strip-chart recording by subtracting the base-line absorbance value from the total absorbance value at peak center. The analytical curve of absorbance vs peak height was plotted in the conventional manner. In plotting the analytical curve, the use of log-log instead of the conventionally used linear-coordinate graph paper provided constant relative precision over the calibrated range when graphical data reduction methods were used.

Wastewater samples for oil determination were received in 1-quart "Mason jar"-type containers. Sample volume was established by attaching a tape reference mark on the jar at the liquid level, transferring the contents to a separatory funnel, rinsing with portions of Freon, refilling to the tape mark with water, then pouring the contents into a 1000-ml graduated cylinder and estimating the volume by visual interpolation between the 10-ml graduations on the cylinder. The uncertainty in establishing the liquid level in the sample jar and graduated cylinder through parallax and meniscus errors in routine operations was found to be approximately  $\pm 2$  mm -- equivalent to  $\pm 20$  ml of sample volume. The resultant error contribution to the analytical results was approximately  $\pm 6$  percent (for a sample volume of 300 ml).

A CERL-designed device was used to directly determine sample volumes through a liquid level vs volume calibration. This device provided both a measurement of sample volume four times more precise than the prescribed method and a significant reduction of operator time. To determine the sample volume, the device is placed on the Mason jar rim, then the depth from the rim to the liquid surface is measured with a vernier caliper integral with the device, and the sample volume is read directly from a previously prepared plot of sample volume vs measured depth from rim to liquid level. The relative error in the use of this method was approximately 1.5 percent for typical sample volumes.

The gravimetric method requires evaporation of the 100 ml of the Freon solvent from the extracted hydrocarbon at a temperature of  $70^{\circ}\text{C}$  and drying at  $80^{\circ}\text{C}$ . This results in partial losses of analyte fractions such as gasoline and other products having significant vapor pressure at those temperatures. Since the IR method does not require evaporation of the solvent from the hydrocarbon extract, losses of low-boiling hydrocarbon fractions are significantly lower than by the gravimetric method.

The determinative step of the gravimetric method requires oil residues to be weighed in 125-ml distilling flasks. The uncertainty of reproducing the tare weight of a vessel of this mass and volume after the necessary handling, evaporation, and drying operations is of the order of 10 mg, or approximately 200 percent or more of the reported value at oil concentrations below 5 mg/l. While the relative precision

of the gravimetric method varies inversely with oil concentration, the relative precision of the IR method is essentially constant over the calibrated range.

CERL's comparison of the gravimetric and IR methods included a consideration of the degree of expertise required to perform the analytical operations. The sampling and extraction operations of the two methods were identical -- assuming the EPA-prescribed separatory funnel technique was used. The weighing operations of the gravimetric method had to be carefully done to minimize tare changes in the flask containing the oil residue. However, since the determinative steps of the gravimetric procedure involve only an analytical balance, the procedure can be successfully performed by analysts who have minimum technical background. The infrared method, however, demands considerably more skill and technical background of the analyst. Technical judgment in selecting and preparing standards, generating analytical curves, establishing operating conditions and maintaining performance levels of the IR spectrophotometer, interpreting spectra, and recognizing spectral aberrations when they occur require that these operations be performed or supervised by a person competent in spectrochemical methods.

#### Future Work

The second phase of the study will generate enough comparative results from gravimetric and IR determinations to permit a statistical comparison. Phase 2 will also evaluate the effect of differences in absorptivity of specific hydrocarbons on observed concentrations by the IR method compared to the gravimetric method. Stability of spectral absorptivities of the various materials in Freon must also be examined, to assure validity of prepared standards stored over a given time interval. An analysis of variance of the procedural steps of the IR method will provide information on the relative attention required in sampling, extraction, solution preparation, standardization, and photometry for optimizing cost-effective operations.

## 6 CONCLUSION

As an initial step in developing methods for identifying hydrocarbon products in Army vehicular service and washrack effluents, IR spectroscopy and GLC methods were evaluated and tested.

Results have shown that IR spectroscopy may provide a basis for the identification of hydrocarbon products for which reference samples are available. In the initial phase of the work, a scheme of sequential discriminant analysis and pattern recognition was used with reference to a file of MIL SPEC hydrocarbon products used in servicing wheel- and track-type Army vehicles. The complexity of IR data reduction was shown to increase rapidly with the number of hydrocarbon products present in a given sample -- a result of a similarity in molecular structure of the hydrocarbon components. The use of GLC in conjunction with IR spectroscopy provided additional discrimination and simplified data reduction.

A comparative investigation of the gravimetric vs IR methods for the quantification of "total hydrocarbons" in wastewater showed that the IR method was capable of higher precision than the gravimetric method at hydrocarbon concentrations less than 10 mg/l, and could provide information on chemical composition and, consequently, the origin of the hydrocarbon product. However, quantification of "total hydrocarbons" by the infrared method required greater skills and technical background of the analyst than the gravimetric method.

#### REFERENCES

1. The Clean Water Act of 1977, Public Law 95-217 (91 Stat 1566).
2. Methods for Chemical Analysis of Water and Wastes, EPA-600/4-79-020, PB297686 (Environmental Protection Agency [EPA], March 1979).
3. Bentz, A. P., "Oil Spill Identification," Analytical Chemistry, Vol 48, No. 6 (1976), p 454A.
4. Bentz, A. P., Oil Spill Identification Bibliography, ADA 029126 (Coast Guard Research and Development Center, March 1976).
5. Adlard, E. R., "A Review of the Methods for the Identification of Persistent Hydrocarbon Pollutants on Seas and Beaches," Journal of the Institute of Petroleum, Vol 58, No. 560 (March 1972), pp 63-74.
6. Ahmadjian, M., C. D. Baer, P. F. Lynch, and C. W. Brown, "Infrared Spectra of Petroleum Weathered Naturally and Under Simulated Conditions," Environmental Science and Technology, Vol 10, No. 8 (August 1976), pp 777-781.
7. Bentz, A. P., "Oil Spill Identification," Analytical Chemistry, Vol 48, No. 6 (May 1976), pp 455A-470A.
8. Brown, C. W., P. F. Lynch, and M. Ahmadjian, "Applications of Infrared Spectroscopy in Petroleum Analysis and Oil Spill Identification," Applied Spectroscopy Review, Vol 9, No. 2 (1975), pp 223-248.
9. Brown, C. W., P. F. Lynch, and M. Ahmadjian, "Monitoring Narragansett Bay Oil Spills by Infrared Spectroscopy," Environmental Science and Technology, Vol 8 (July 1974), pp 669-670.
10. Brown, C. W., "Identification and Differentiation of Heavy Residual Oil and Asphalt Pollutants in Surface Water by Comparative Ratios of Infrared Absorbances," Environmental Science and Technology, Vol 3, No. 2 (February 1969), pp 150-153.
11. Kawahara, F. K., and D. G. Ballinger, "Characterization of Oil Slicks on Surface Waters," Industrial Engineering Chemistry, Product Research and Development, Vol 9, No. 4 (1970), pp 553-558.



# REFERENCES (Cont'd)

12. Kawahara, F. K., J. F. Santner, and E. C. Julian, "Characterization of Heavy Residual Fuel Oils and Asphalts by Infrared Spectrophotometry Using Statistical Discriminant Function Analysis," Analytical Chemistry, Vol 46, No. 2 (February 1974), pp 266-273.
13. Lynch, P. F., and C. W. Brown, "Identifying Source of Petroleum by Infrared Spectroscopy," Environmental Science and Technology, Vol 7, No. 13 (December 1973), pp 1123-1127.
14. Mattson, J. S., "'Fingerprinting' of Oil by Infrared Spectrometry," Analytical Chemistry, Vol 43, No. 13 (November 1971), pp 1872-1873.
15. Spencer, M. J., Oil Identification Using Infrared Spectrometry, UM-RSMAS #7502, DOT-CG-81-75-1364 (Department of Transportation, United States Coast Guard, June 1975).
16. Wilson, C. A., E. P. Ferrero, and H. J. Coleman, Crude Oil Spills Research: An Investigation and Evaluation of Analytical Techniques, PB 242128, Bureau of Mines Report of Investigation 8024 (1975).
17. Chisholm, B. R., H. G. Eldering, L. P. Giering, and A. W. Hornig, Total Luminescence Contour Spectra of Six Topped Crude Oils, BERC RI-76/16 (1976).
18. Freegarde, M., C. G. Hatchard, and C. A. Parker, "Oil Spill at Sea: Its Identification, Determination, and Ultimate Fate," Laboratory Practice, Vol 20, No. 1 (1971), pp 35-40.
19. John, P., and I. Soutar, "Identification of Crude Oils by Synchronous Excitation Spectrofluorimetry," Analytical Chemistry, Vol 48, No. 3 (March 1976), pp 520-524.
20. Parker, C. A., and W. J. Barnes, "Spectrophotofluorimetry of Lubricating Oils: Determination of Oil Mist in Air," Analyst, Vol 85 (1960), pp 3-8.
21. Thruston, A. D., and R. W. Knight, "Characterization of Crude and Residual-Type Oils by Fluorescence Spectroscopy," Environmental Science and Technology, Vol 5, No. 1 (January 1971), pp 64-69.
22. ASTM Method D3650-78, "New Standard Method of Test for Comparison of Waterborne Petroleum Oils by Fluorescence Analysis," Book of ASTM Standards, Part 31 (American Society for Testing and Materials [ASTM]).

# REFERENCES (Cont'd)

23. Adlard, E. R., L. F. Creaser, and P. H. D. Matthews, "Identification of Hydrocarbon Pollutants on Seas and Beaches by Gas Chromatography," Analytical Chemistry, Vol 44, No. 1 (January 1972), pp 64-73.
24. Garza, M. E., and J. Muth, "Characterization of Crude, Semirefined and Refined Oils by Gas-Liquid Chromatography," Environmental Science and Technology, Vol 8, No. 3 (March 1974), pp 249-255.
25. Petrovic, K., and D. Vitorovic, "Recognition and Qualitative Characterization of Commercial Petroleum Fuels and Synthetic Fuels by Gas Chromatographic Fingerprinting Technique," Journal of Chromatography, Vol 119 (1976), pp 413-422.
26. Ramsdale, S. J., and R. E. Wilkinson, "Identification of Petroleum Sources of Beach Pollution by Gas-Liquid Chromatography," Journal of the Institute of Petroleum, Vol 54, No. 539 (November 1968), pp 326-332.
27. Rasmussen, D. V., "Characterization of Oil Spills by Capillary Column Gas Chromatography," Analytical Chemistry, Vol 48, No. 11 (September 1976), pp 1562-1566.
28. Zafiriou, O. C., "Improved Method for Characterizing Environmental Hydrocarbons by Gas Chromatography," Analytical Chemistry, Vol 45, No. 6 (May 1973), pp 952-956.
29. Adlard, E. R., L. F. Creaser, and P. H. D. Matthews, "Identification of Hydrocarbon Pollutants on Seas and Beaches by Gas Chromatography," Analytical Chemistry, Vol 44, No. 1 (January 1972), pp 64-73.
30. Cole, R. D., "Recognition of Crude Oils by Capillary Gas Chromatography," Nature, Vol 233 (October 1971), pp 546-548.
31. "Analytical Methods for the Identification of the Source of Pollution by Oil of the Seas, Rivers, and Beaches," Journal of the Institute of Petroleum, Vol 56, No. 548 (March 1970), pp 107-117.
32. Kawahara, F. K., "Characterization and Identification of Spilled Fuel Oils by Gas Chromatography and Infrared Spectrophotometry," Journal of Chromatographic Science, Vol 10 (October 1972), pp 629-636.
33. Kawahara, F. K., "Trace Organic Components as Fingerprints in Gas Chromatographic Identification of Spilled Asphalts," Environmental Science and Technology, Vol 10, No. 8 (August 1976), pp 761-765.

# REFERENCES (Cont'd)

34. Kreider, R. E., "Identification of Oil Leaks and Spills," Proceedings of Joint Conference on Prevention and Control of Oil Spills (American Petroleum Institute, June 15-17, 1971).
35. Petrovic, K., and D. Vitorovic, "Recognition and Qualitative Characterization of Commercial Petroleum Fuels and Synthetic Fuels by Gas Chromatographic Fingerprinting Technique," Journal of Chromatography, Vol 119 (1976), pp 413-422.
36. Pym, J. G., J. E. Ray, G. W. Smith, and E. V. Whitehead, "Petroleum Triperpane Fingerprinting of Crude Oils," Analytical Chemistry, Vol 47, No. 9 (August 1975), pp 1617-1622.
37. Ramsdale, S. J., and R. E. Wilkinson, "Identification of Petroleum Sources of Beach Pollution by Gas-Liquid Chromatography," Journal of the Institute of Petroleum, Vol 54, No. 539 (November 1968), pp 326-332.
38. Rasmussen, D. V., "Characterization of Oil Spills by Capillary Column Gas Chromatography," Analytical Chemistry, Vol 48, No. 11 (September 1976), pp 1562-1566.
39. Zafiriou, O. C., "Improved Method for Characterizing Environmental Hydrocarbons by Gas Chromatography," Analytical Chemistry, Vol 45, No. 6 (May 1973), pp 952-956.
40. ASTM Method D-3328-78, "Method of Test for Comparison of Waterborne Petroleum Oils by Gas Chromatography," Book of ASTM Standards, Part 31 (ASTM).
41. Saner, W. A., G. E. Fitzgerald, and J. P. Welsh, "Liquid Chromatographic Identification of Oils by Separation of the Methanol Extractable Fraction," Analytical Chemistry, Vol 48, No. 1747 (October 1976).
42. Brunnock, J. V., D. F. Duckworth, and G. G. Stephens, "Analysis of Beach Pollutants," Journal of the Institute of Petroleum, Vol 54, No. 539 (November 1968), pp 310-325.
43. Duewer, D. L., B. R. Kowalski, and T. F. Schatzki, "Source Identification of Oil Spills by Pattern Recognition Analysis of Natural Elemental Composition," Analytical Chemistry, Vol 47, No. 9 (August 1975), pp 1574-1583.
44. Adlard, E. R., "A Review of the Methods for the Identification of Persistent Hydrocarbon Pollutants on Seas and Beaches," Journal of the Institute of Petroleum, Vol 58, No. 560 (March 1972), pp 63-74.

# REFERENCES (Cont'd)

45. Gruenfeld, M., Proceedings of the Joint Conference on Prevention and Control of Oil Spills (American Petroleum Institute, 1973), p 179.
46. Gruenfeld, M., "Extraction of Dispersed Oils From Water for Quantitative Analysis by Infrared Spectrophotometry," Environmental Science and Technology (July 1973).
47. Gruenfeld, M., "Quantitative Analysis of Petroleum Oil Pollutants by Infrared Spectrophotometry," Water Quality Parameters, ASTM Special Technical Publication (STP) 573.290-308 (ASTM, 1975).
48. Brown, R. A., et al., Measurement and Interpretation of Non-Volatile Hydrocarbons in the Ocean, Part I: The Measurement in the Atlantic Mediterranean, Gulf of Mexico, and Persian Gulf, Contract C-I-35049, COM 74-11634 (Department of Commerce, Maritime Administration (July 1974).
49. Oil and Grease, Total Recoverable (Infrared), EPA STORET No. 00560.
50. Mattson, J. W., et al., "Multivariate Statistical Approach to the Fingerprinting of Oils by Infrared Spectrometry," Analytical Chemistry, Vol 49, No. 2 (1977), pp 297-302.
51. Kawahara, F. K., and Y. Y. Yang, "Systems Chemical Analysis of Petroleum Pollutants," Analytical Chemistry, Vol 48, No. 4 (1976), pp 651-655.
52. Vogel, R. S., A Spectrochemical Method for the Determination of Individual Rare Earth Elements in Uranium Ore Concentrates and High-Purity Uranium Compounds, MCW 1498 (1966).
53. Kahn, L., B. F. Dudenbostel, D. N. Speis, and G. Karras, "Determination of Petroleum-Derived Oils and Vegetable/Animal Oils in the Presence of Each Other," American Laboratory (March 1977).
54. Gruenfeld, M., and R. Frederick, "The Ultrasonic Dispersion, Source Identification, and Quantitative Analysis of Petroleum Oils in Water," Rapports et Procesverbaux des Reunions, Vol 171 (Conseil International Pour L'Exploration de la Mer, 1977), pp 33-38.
55. Brown, C. W., P. F. Lynch, and M. Ahmadjian, Identification of Oil Slicks by Infrared Spectroscopy, Final Report, U.S. Coast Guard Contract DOT-CT-81-74-1099/ADA040975 (August 1976).
56. Frankenfeld, J. W., Weathering of Oil at Sea, Final Report, U.S. Coast Guard Contract DOT-CG-23035-A/AD787789 (September 1973).

#### REFERENCES (Cont'd)

57. Flanigan, G. A., R. D. Copperthite, and S. Buchanan, Laboratory Weathering of Petroleum, 1978 Pittsburgh Conference, Paper 556.
58. Anderson, C. P., T. J. Killeen, J. B. Taft, and A. P. Bentz, Artificial Oil Weathering Techniques, paper submitted to 1979 Pittsburgh Conference.
59. Zurcher, F., and M. Thuer, "Rapid Weathering Processes of Fuel Oil in Natural Waters: Analyses and Interpretations," Environmental Science and Technology, Vol 12, No. 7 (July 1978).
60. Mecks, D. C., J. J. Bommarito, R. S. Schwantje, and A. T. Edgerton, Transfer, Installation and Flight Testing of the Modified Airborne Oil Surveillance System (AOSS II) in an HC-130B Aircraft, Final Report, U.S. Coast Guard CG-D-60-77/ADA052434 (August 1977).
61. Grizzle, P. L., and H. J. Coleman, "GLC Analysis of N-Paraffin Distribution in Crude Oils and Topped Crude Oils for Oil Identification," BERC/RI-77/12 (1977).
62. ASTM Method D-3415-75T, "Practices for Identification of Waterborne Oils," Annual Book of ASTM Standards, Part 31 (ASTM).
63. ASTM Method D 3326-78, "Preparation of Samples for Identification of Waterborne Oils" (ASTM).
64. Bentz, A. P., Oil Spill Identification and Remote Sensing, U.S. Coast Guard Research and Development Center, presented at Division of Petroleum Chemistry, American Chemical Society Meeting (September 1978).
65. Manual on Disposal of Refinery Wastes, Vol IV, Method 733-58 (American Petroleum Institute, 1958).

# CERL DISTRIBUTION

Chief of Engineers  
ATTN: Tech Monitor  
ATTN: DAEN-RD  
ATTN: DAEN-MP  
ATTN: DAEN-ZC  
ATTN: DAEN-CW  
ATTN: DAEN-RM  
ATTN: DAEN-CCP  
ATTN: DAEN-ASL-L (2)

## US Army Engineer Districts

ATTN: Library  
Alaska  
Albaton  
Albuquerque  
Baltimore  
Buffalo  
Charleston  
Chicago  
Detroit  
Far East  
Fort Worth  
Galveston  
Huntington  
Jacksonville  
Japan  
Jidda  
Kansas City  
Little Rock  
Los Angeles  
Louisville  
Memphis  
Mobile  
Nashville  
New Orleans  
New York  
Norfolk  
Omaha  
Philadelphia  
Pittsburgh  
Portland  
Riyadh  
Rock Island  
Sacramento  
San Francisco  
Savannah  
Seattle  
St. Louis  
St. Paul  
Tulsa  
Vicksburg  
Walla Walla  
Wilmington

## US Army Engineer Divisions

ATTN: Library  
Europe  
Huntsville  
Lower Mississippi Valley  
Middle East  
Middle East (Rear)  
Missouri River  
New England  
North Atlantic  
North Central  
North Pacific  
Ohio River  
Pacific Ocean  
South Atlantic  
South Pacific  
Southwestern

## Waterways Experiment Station

ATTN: Library

## Cold Regions Research Engineering Lab

ATTN: Library

## US Government Printing Office Receiving Section/Depository Copies (2)

## Defense Technical Information Center ATTN: DDA (12)

## Engineering Societies Library New York, NY

## FESA, ATTN: Library

## ETL, ATTN: Library

## Engr. Studies Center, ATTN: Library

## Inst. for Water Res., ATTN: Library

## Army Instl. and Major Activities (CONUS)

### DARCOM - Dir., Instl. & Svcs.

#### ATTN: Facilities Engineer

ARRADCOM  
Aberdeen Proving Ground  
Army Matis. and Mechanics Res Ctr.  
Corpus Christi Army Depot  
Harry Diamond Laboratories  
Dugway Proving Ground  
Jefferson Proving Ground  
Fort Monmouth  
Letterkenny Army Depot  
Natick Research and Dev. Ctr.  
New Cumberland Army Depot  
Pueblo Army Depot  
Red River Army Depot  
Redstone Arsenal  
Rock Island Arsenal  
Savannah Army Depot  
Sharpe Army Depot  
Seneca Army Depot  
Tobyhanna Army Depot  
Tooele Army Depot  
Watervliet Arsenal  
Yuma Proving Ground  
White Sands Missile Range

## FORSCOM

### FORSCOM Engineer, ATTN: AFEN-FE

#### ATTN: Facilities Engineers

Fort Buchanan  
Fort Bragg  
Fort Campbell  
Fort Carson  
Fort Devens  
Fort Drum  
Fort Hood  
Fort Indiantown Gap  
Fort Irwin  
Fort Sam Houston  
Fort Lewis  
Fort McCoy  
Fort McPherson  
Fort George G. Meade  
Fort Ord  
Fort Polk  
Fort Richardson  
Fort Riley  
Presidio of San Francisco  
Fort Sheridan  
Fort Stewart  
Fort Wainwright  
Vancouver Bks.

## TRADOC

### HQ, TRADOC, ATTN: ATEN-FE

#### ATTN: Facilities Engineer

Fort Belvoir  
Fort Benning  
Fort Bliss  
Carlisle Barracks  
Fort Chaffee  
Fort Dix  
Fort Eustis  
Fort Gordon  
Fort Hamilton  
Fort Benjamin Harrison  
Fort Jackson  
Fort Knox  
Fort Leavenworth  
Fort Lee  
Fort McClellan  
Fort Monroe  
Fort Rucker  
Fort Sill  
Fort Leonard Wood

## INSCOM - Ch. Instl. Div.

### ATTN: Facilities Engineer

Vint Hill Farms Station  
Arlington Hall Station

## WESTCOM

ATTN: Facilities Engineer  
Fort Shafter

## MDW

ATTN: Facilities Engineer  
Cameron Station  
Fort Lesley J. McNair  
Fort Myer

## HSC

HQ USAHSC, ATTN: HSLO-F  
ATTN: Facilities Engineer  
Fitzsimons Army Medical Center  
Walter Reed Army Medical Center

## USACC

ATTN: Facilities Engineer  
Fort Huachuca  
Fort Ritchie

## MTMC

HQ, ATTN: MTMC-SA  
ATTN: Facilities Engineer  
Oakland Army Base  
Bayonne MOT  
Sunny Point MOT

## US Military Academy

ATTN: Facilities Engineer

## USAES, Fort Belvoir, VA

ATTN: FE Mgmt. Br.  
ATTN: Const. Mgmt. Br.  
ATTN: Engr. Library

## Chief Inst. Div., I&SA, Rock Island, IL

## USA ARRCOM, ATTN: Dir., Instl & Svc

### TARCOM, Fac. Div.

### TECOM, ATTN: DRSTE-LG-F

### TSARCOM, ATTN: STSAS-F

### NARAD COM, ATTN: DRDNA-F

### AMMRC, ATTN: DRXMR-WE

## HQ, XVIII Airborne Corps and

Ft. Bragg

ATTN: AFZA-FE-EE

## HQ, 7th Army Training Command

ATTN: AETTG-DEH (5)

## HQ USAREUR and 7th Army

### ODCS/Engineer

ATTN: AEAEN-EH (4)

## V Corps

ATTN: AETVDEH (5)

## VII Corps

ATTN: AETSDEH (5)

## 21st Support Command

ATTN: AEREH (5)

## US Army Berlin

ATTN: AEBN-EN (2)

## US Army Southern European Task Force

ATTN: AESE-ENG (5)

## US Army Installation Support Activity,

Europe

ATTN: AEUES-RP

## 8th USA, Korea

ATTN: EAFE

Cdr, Fac Engr Act (8)

AFE, Yongsan Area

AFE, 20 Inf Div

AFE, Area II Spt Det

AFE, Cp Humphreys

AFE, Pusan

AFE, Taegu

## DLA ATTN: DLA-WI

## USA Japan (USARJ)

Ch, FE Div, AJEN-FE

Fac Engr (Monsu)

Fac Engr (Okinawa)

## ROK/US Combined Forces Command

ATTN: EUSA-MHC-CFC/Engr

ENE Branch Distribution

Picatinny Arsenal  
ATTN: SMUPA-VP3  
  
Director of Facilities Engineering  
Miami, FL 34004

DARCOM STIT-EIJR  
APO New York 09710

West Point, NY 10996  
ATTN: Dept of Mechanics  
ATTN: Library

HQDA (SGRD-EDE)

Chief of Engineers  
ATTN: DAEN-MPO-B  
ATTN: DAEN-MPO-U  
ATTN: DAEN-MPR  
ATTN: DAEN-MPZ-A  
ATTN: DAEN-RDL  
ATTN: DAEN-ZCE

National Defense Headquarters  
Director General of Construction  
Ottawa, Ontario K1A0K2  
Canada

Division of Building Research  
National Research Council  
Montreal Road  
Ottawa, Ontario K1A0R6  
Canada

Airports and Construction Services Dir  
Technical Information Reference Centre  
KAOL, Transport Canada Building  
Place de Ville  
Ottawa, Ontario K1A0N8  
Canada

British Liaison Officer (S)  
U.S. Army Mobility Equipment  
Research and Development Center  
Ft Belvoir, VA 22060

Aberdeen Proving Ground, MD 21005  
ATTN: AMXHE/J. D. Weisz

Ft Belvoir, VA 22060  
ATTN: Learning Resources Center  
ATTN: ATSE-TD-TL (2)  
ATTN: Kingman Bldg. Library  
ATTN: MAJ Shurb (4)

Ft Leavenworth, KS 66027  
ATZLCA-SA/F. Wolcott

Ft Monroe, VA 23651  
ATTN: ATEN-AD (3)  
ATTN: ATEN-FE-E  
ATTN: ATEN-FE-U

Ft Lee, VA 23801  
ATTN: DRXMC-D (2)

US Army Foreign Science & Tech Center  
ATTN: Charlottesville, VA 22901  
ATTN: Far East Office

5th US Army  
ATTN: AFKB-LG-E

6th US Army  
ATTN: AFKC-EN

US Army Engineer District  
New York  
ATTN: Chief, NAMEN-E  
ATTN: Chief, Design Br  
Pittsburgh  
ATTN: Chief, Engr Div

US Army Engineer District  
Philadelphia  
ATTN: Chief, NAPEN-E  
Norfolk  
ATTN: Chief, NAOEN-D  
Huntington  
ATTN: Chief, ORHED-H  
Wilmington  
ATTN: Chief, SAWEN-PM  
ATTN: Chief, SAWEN-E  
Charleston  
ATTN: Chief, Engr Div  
Savannah  
ATTN: Chief, SASAS-L  
Jacksonville

ATTN: Env Res Br  
Mobile  
ATTN: Chief, SAMEN-C  
Vicksburg  
ATTN: Chief, Engr Div  
Louisville  
ATTN: Chief, Engr Div  
St Paul  
ATTN: Chief, ED-H  
Chicago  
ATTN: Chief, NCCCO-R  
ATTN: Chief, NCCED-H  
ATTN: Chief, NCCPD-ER  
St Louis  
ATTN: Chief, ED-B  
ATTN: Chief, ED-D  
Kansas City  
ATTN: Chief, Engr Div  
Omaha

ATTN: Chief, Engr Div  
Little Rock  
ATTN: Chief, Engr Div  
Tulsa  
ATTN: Chief, Engr Div  
Fort Worth  
ATTN: SWFED-D  
ATTN: SWFED-MA  
Galveston  
ATTN: Chief, SWGAS-L  
ATTN: Chief, SWGCO-M  
Los Angeles  
ATTN: Chief, SPLED-E  
San Francisco  
ATTN: Chief, Engr Div  
Sacramento  
ATTN: Chief, SPKED-D  
Far East  
ATTN: Chief, Engr Div  
Seattle

ATTN: Chief, NPSEN-FM  
ATTN: Chief, EN-DB-SE  
ATTN: Chief, NPSEN-PL-WC  
ATTN: Chief, NPSEN-PL-ER  
Walla Walla  
ATTN: Chief, Engr Div  
Alaska  
ATTN: NPASA-R

US Army Engineer Division  
New England  
ATTN: Chief, NEDED-E  
North Atlantic  
ATTN: Chief, NADEN-T  
Middle East (Rear)  
ATTN: MEDED-T

South Atlantic  
ATTN: Chief, SADEN-TE  
Huntsville  
ATTN: Chief, HNDED-CS  
ATTN: Chief, HNDED-ME  
ATTN: Chief, HNDED-SR  
Lower Mississippi Valley  
ATTN: Chief, PD-R  
Ohio River  
ATTN: Chief, Engr Div  
North Central  
ATTN: Chief, Engr Planning Br

US Army Engineer Division  
Missouri River  
ATTN: Chief, MRDED-T  
Southwestern  
ATTN: Chief, SWDED-TH  
South Pacific  
ATTN: Chief, SPDED-TG  
ATTN: Laboratory  
Pacific Ocean  
ATTN: Chief, Engr Div  
ATTN: Chief, PODED-MP  
ATTN: Chief, PODED-P  
North Pacific  
ATTN: Chief, Engr Div

HQ FORSCOM  
ATTN: AFIN-CN  
Ft McPherson, GA 30330

AF/RDXT  
WASH DC 20330

M. J. Kerby  
HQ ADCOM/DEMUS  
Peterson AFB, CO R0914

John Wall  
2P54 ABG/DEEE  
Tinker AFB, OK 73145

LT David C. Hall  
2852 APG/DE  
McClellan AFB, CA 95652

AFESC/PRT  
Tyndall AFB, FL 32403

AF/PREEU  
Bolling AFB, DC 20332

Little Rock AFB  
ATTN: 314/DEEE (Mr. Gillham)

US Naval Oceanographic Office  
Library  
Bay St Louis, MS 39522

Naval Training Equipment Center  
ATTN: Technical Library  
Orlando, FL 32813

Naval Facilities Engr Command  
ATTN: Code 04  
Alexandria, VA 22332

LT Neil B. Hall, CEC, USNR (Code 100)  
884-6366  
US Navy Public Works Center  
Box 6, FPO San Francisco 96651

Port Hueneme, CA 93043  
ATTN: Library (Code LORA)  
ATTN: Morrell Library

Washington, DC  
ATTN: Building Research Advisory Board  
ATTN: Transportation Research Board  
ATTN: Library of Congress (2)  
ATTN: Dept of Transportation Library

W. N. Lofross, P.E.  
Dept of Transportation  
Tallahassee, FL 32304

James T. Burns  
Base Civil Engineering Sqdn  
Patrick AFB, FL 32925

Vogel, Raymond S

Identification and quantification of hydrocarbon products in effluents /  
by R. S. Vogel ... et al. -- Champaign, IL : Construction Engineering Research  
Laboratory ; Springfield, VA : available from NTIS, 1980.  
57 p. ; 27 cm (interim report ; N-91)

1. Sewage -- analysis. 2. Hydrocarbons -- analysis. 3. Organic water  
pollutants -- analysis. I. Fileccia, Robert J. II. Mikucki, Walter J.  
III. Lampo, Richard G. IV. Title. V. Series: U.S. Army Construction  
Engineering Research Laboratory. Interim report ; N-91.